

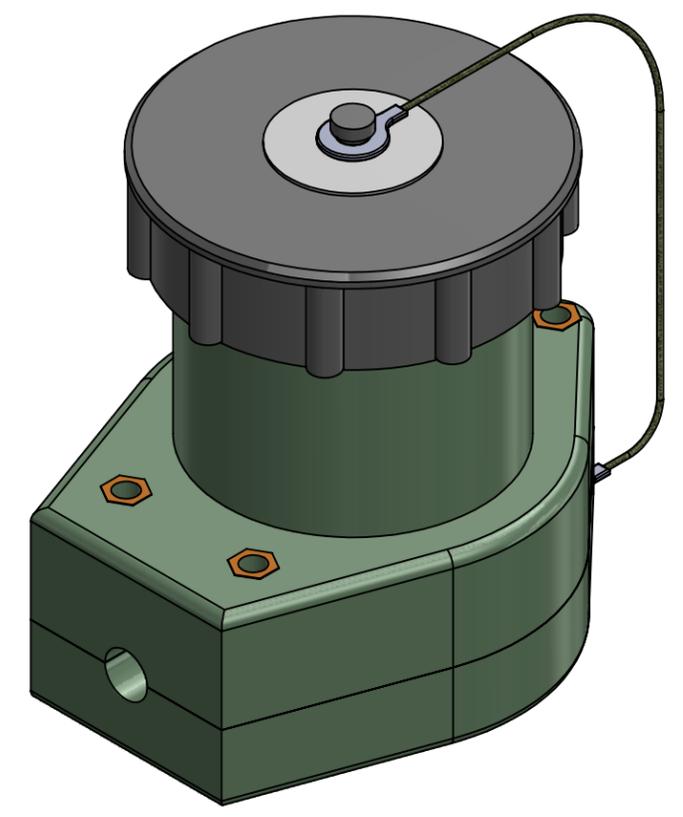
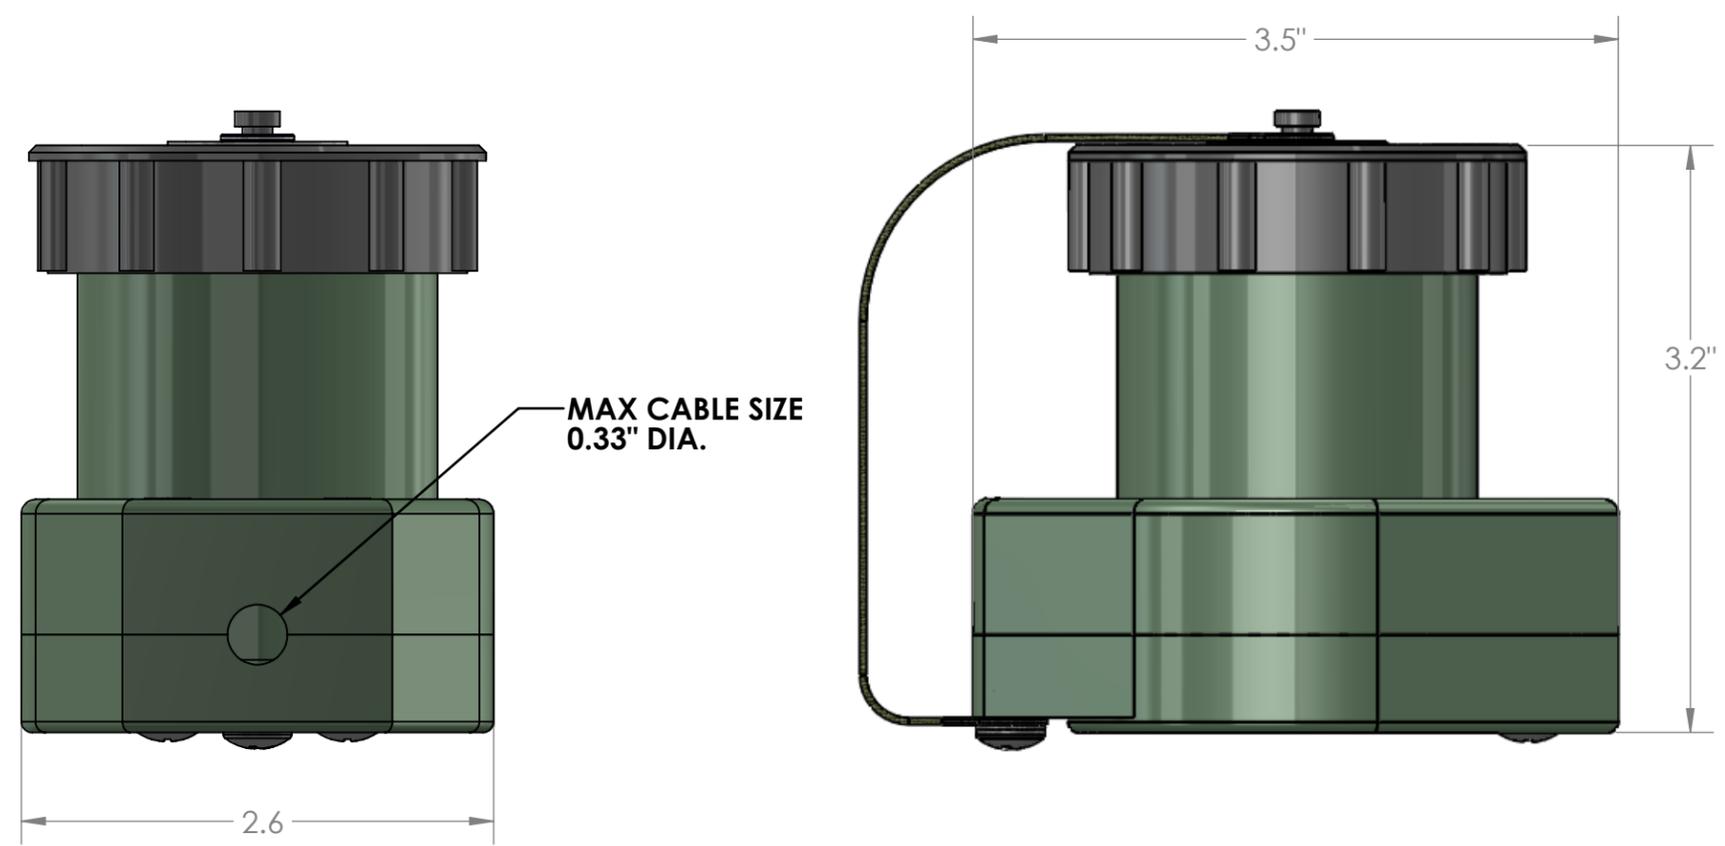


REV	DATE	DESCRIPTION OF CHANGE	ENG
B	02/09/15	RELEASED. SEE DCN SN0264-	RJB

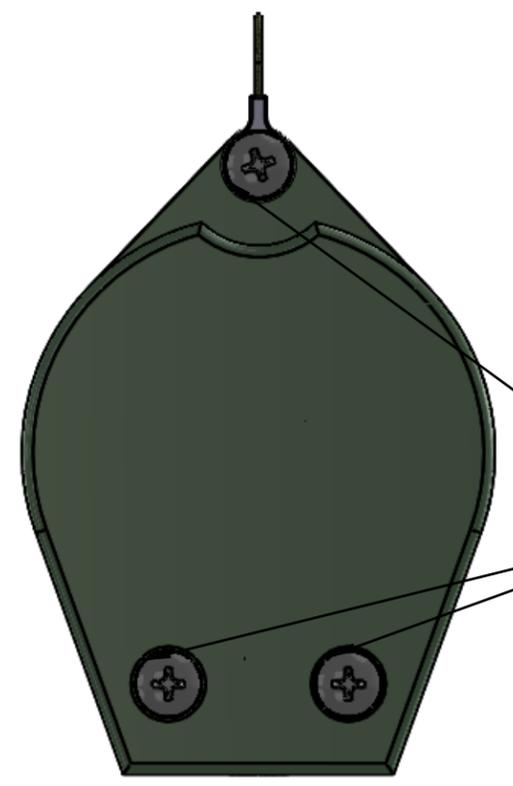

Place Bead of waterproof silicone adhesive on the bottom cap prior to assembly as show in picture to left.

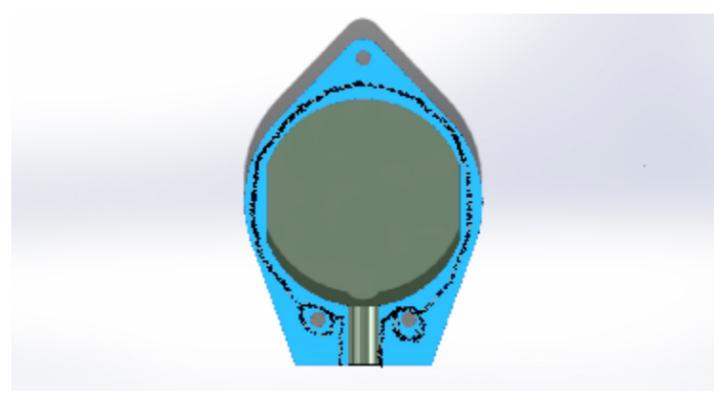

(3) M3 x 28mm SCREWS
Torque Screws to 1.8-2.5 in/lbs.

BILL OF MATERIALS				
ITEM NO.	PART NUMBER	QTY	NAME	COMMENTS
1	SN-210	1	NATO CONNECTOR KIT	SUPPLYNET PROVIDED

UNLESS OTHERWISE SPECIFIED:		REF. SN0264		PART NUMBER: SN-210	
DIMENSIONS ARE IN: INCHES		DRAWN	RJB	03/06/14	 706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989
TOLERANCES: .XX: ± 0.03		CHECKED	RJB	03/06/14	
.XXX: ± 0.005		COMMENTS:		TITLE:	
ANGULAR: .X°: 1°		<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.</p>		<p>SN-210 NATO PLUG</p>	
.XX°: 0.5°		CAGE CODE: 1HJX9		SIZE	DWG. NO.
BREAK EDGES: .005 - .020				B	SN-210
FILLET: .005 - .020				SCALE: NA	WEIGHT:
SURFACE FINISH:				SHEET 1 OF 1	
GEOMETRIC TOLERANCING PER: ASME Y14.5-2009				REV	B
MATERIAL: SEE DRAWING NOTES					
FINISH: SEE DRAWING NOTES					
DO NOT SCALE DRAWING					