



REVISIONS			
REV.	DESCRIPTION	DATE	ENG
B	CORRECTED MODEL REFERENCES	06/20/20	TC
C	REMOVED 2-56 HELICOILS	12/27/21	MOB

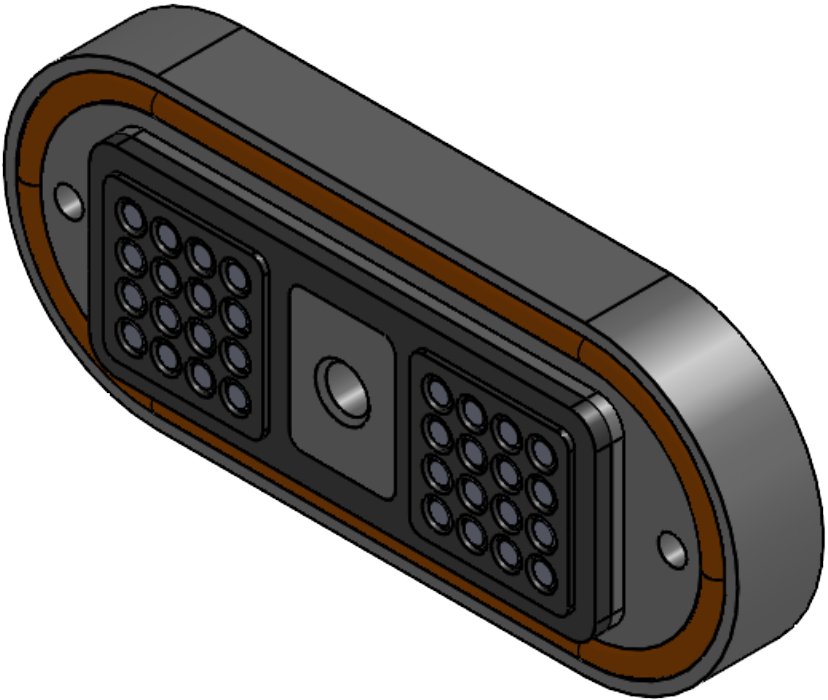

SPECIFICATIONS	
MATERIAL FINISH	
HOUSING	ALUMINUM ALLOY PER UNS A96061
	TEMPER T6 (6061-T6)
	PLATED WITH MATT ELECTROLESS NICKEL.CLASS 4 , GRADE B (.0005/.00075 IN. THK) PER MIL -C 26074.
INSULATOR	NON CONDUCTIVE PLASTIC, COLOR BLACK
GASKET	SILICONE, RED
ELECTRICAL PROPERTIES	
VOLTAGE	100 VDC MAX @ 125C
AMPERAGE	5A MAX
MIL-STD	
OPERATING TEMPERATURE	-55C TO 85C
AIR PRESSURE	2.8 PSI LEAK TEST FOR 30 MINUTES, BOTH DIRECTIONS
SAND AND DUST	MIL-STD-810E,METHOD 510.3
FUNGUS	MIL-STD-810E,METHOD 508.4 FOR 28 DAYS
SALT FOG	MIL-STD-810E,METHOD 5109.1

UNLESS OTHERWISE SPECIFIED:		NAME		DATE				706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989	
DIMENSIONS ARE IN: INCHES TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005 ANGULAR: .X°: 1° .XX°: 0.5° BREAK EDGES: .005 - .020 FILLETS: .005 - .020 SURFACE FINISH:  GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009  MATERIAL: SEE DRAWING NOTES FINISH: SEE DRAWING NOTES  DO NOT SCALE DRAWING	DRAWN	TC	08/18/16		TITLE:  UN-FILTERED RAPID MATE CONNECTOR (REPLACES 58-001-015)				
	CHECKED	RJB	08/18/16						
	COMMENTS:	<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.			SIZE	DWG. NO.	REV		
	CAGE CODE: 1HJX9				<b>B</b>	<b>SN-12053-5225-N8</b>	<b>C</b>		
			SCALE: NA		WEIGHT:		SHEET 1 OF 1		