

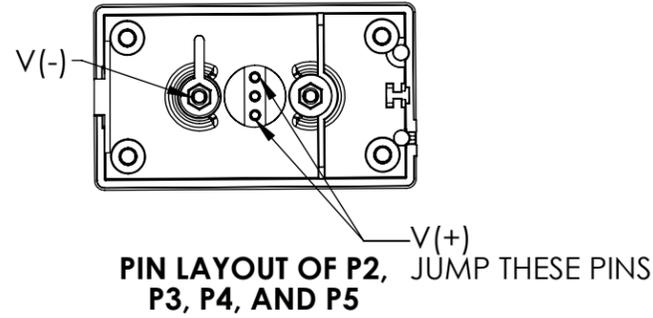
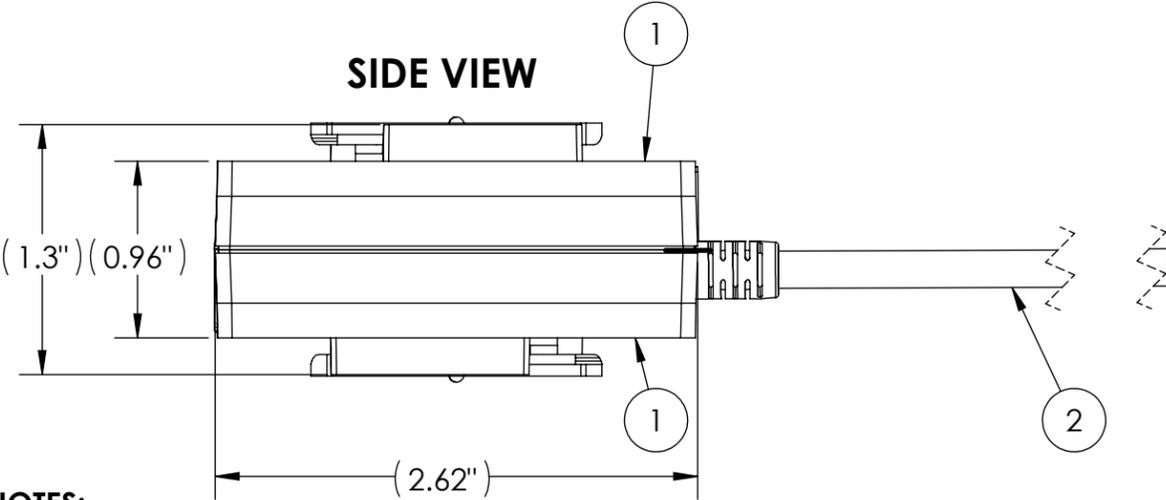


TABLE 1: WIRING (P1 TO P2 AND P3)				
P1	WIRE COLORS	P2	WIRE COLORS	P3
POSITIVE	RED	V(+)	RED	V(+)
NEGATIVE	GREEN	V(-)	GREEN	V(-)

TABLE 2: WIRING (P1 TO P4 AND P5)				
P1	WIRE COLORS	P4	WIRE COLORS	P5
POSITIVE	RED	V(+)	RED	V(+)
NEGATIVE	GREEN	V(-)	GREEN	V(-)

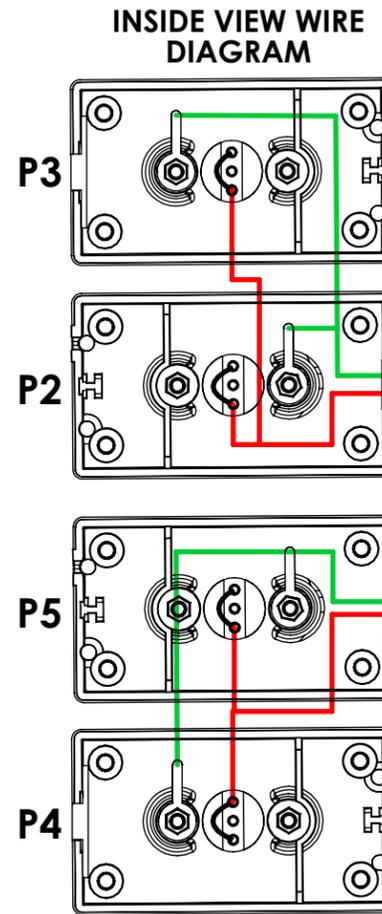

REV	DATE	DESCRIPTION OF CHANGE	ENG
A	12/18/18	INITIAL RELEASE	LS

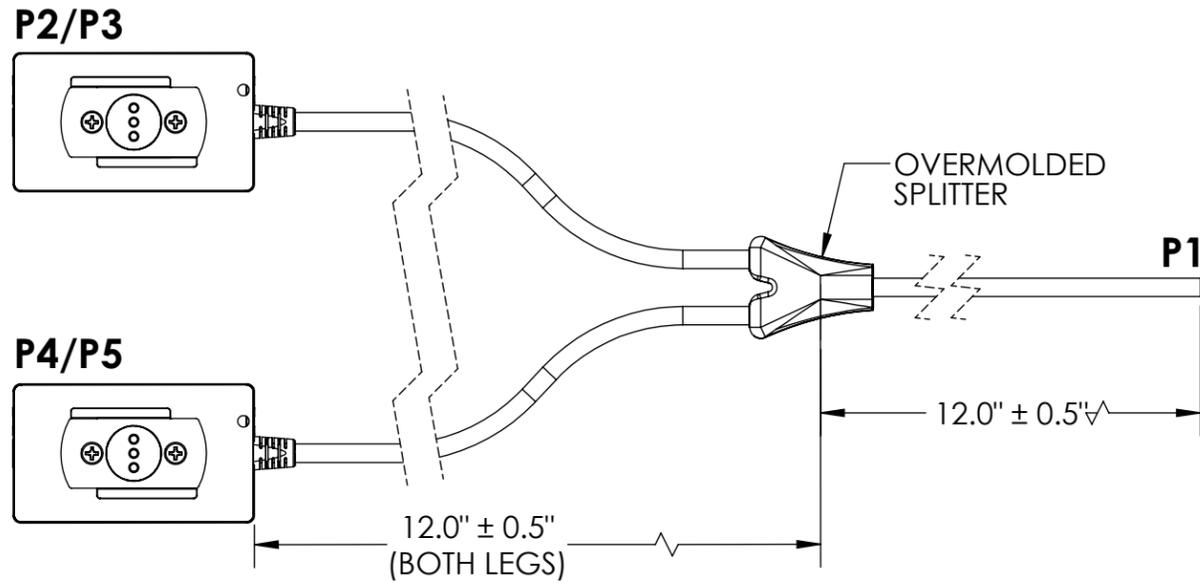

NOTES:

- SOLDERING IPC-J-STD-001 CLASS II AS APPLICABLE.
- CABLE ASSEMBLIES TO BE TESTED 100% FOR CONTINUITY, SHORTS, AND INSULATION RESISTANCE.
- IDENTIFICATION: BAG AND IDENTIFY ON PACKAGING THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. UOS PART MARKING ON THE WIRE IS PROHIBITED:
PN: SN-1034-12-X2 REV X (REV MARKING PER PO)
CAGE CODE: 1HJX9
DATE OF MFR: MM/YY
- WIRE PER TABLES 1 AND 2.
- MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.

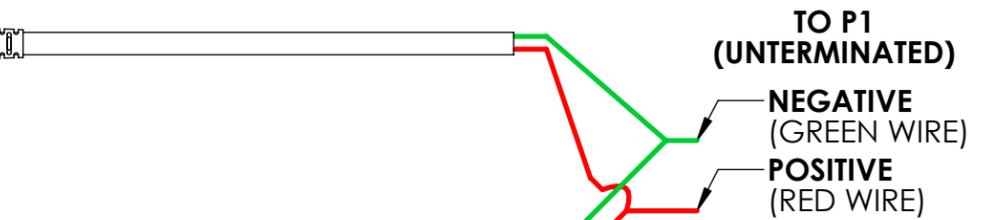


TABLE 3: BILL OF MATERIALS			
ITEM NO.	PART NO	QTY	NAME/DESCRIPTION
1	SN-799	4	MBITR BATTERY CONNECTOR
2	202C-V04A	39"	CABLE, 20AWG *2C, 4.6MM OD

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN: INCHES		DRAWN	LS 12/18/18
TOLERANCES: .XX: ± 0.03		CHECKED	RB 12/18/18
.XXX: ± 0.005		COMMENTS:	
ANGULAR: .X°: 1°		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.	
.XX': 0.5°		SIZE B DWG. NO. SN-1034-12-X2 REV A	
BREAK EDGES: .005 - .020		SCALE: NA WEIGHT: SHEET 1 OF 1	
FILLET: .005 - .020		CAGE CODE: 1HJX9	
SURFACE FINISH:		DO NOT SCALE DRAWING	
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009			
MATERIAL: SEE DRAWING NOTES			
FINISH: SEE DRAWING NOTES			

REF. NUMBER: SN0516		
706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989		
TITLE: DOUBLE PRC-148/152 DUAL BATTERY ADAPTOR UNTERMINATED, 12V, 24" LENGTH		