


REV	DATE	DESCRIPTION OF CHANGE	ENG
D	11/26/13	REVISED. SEE DCN SN0114B	TC

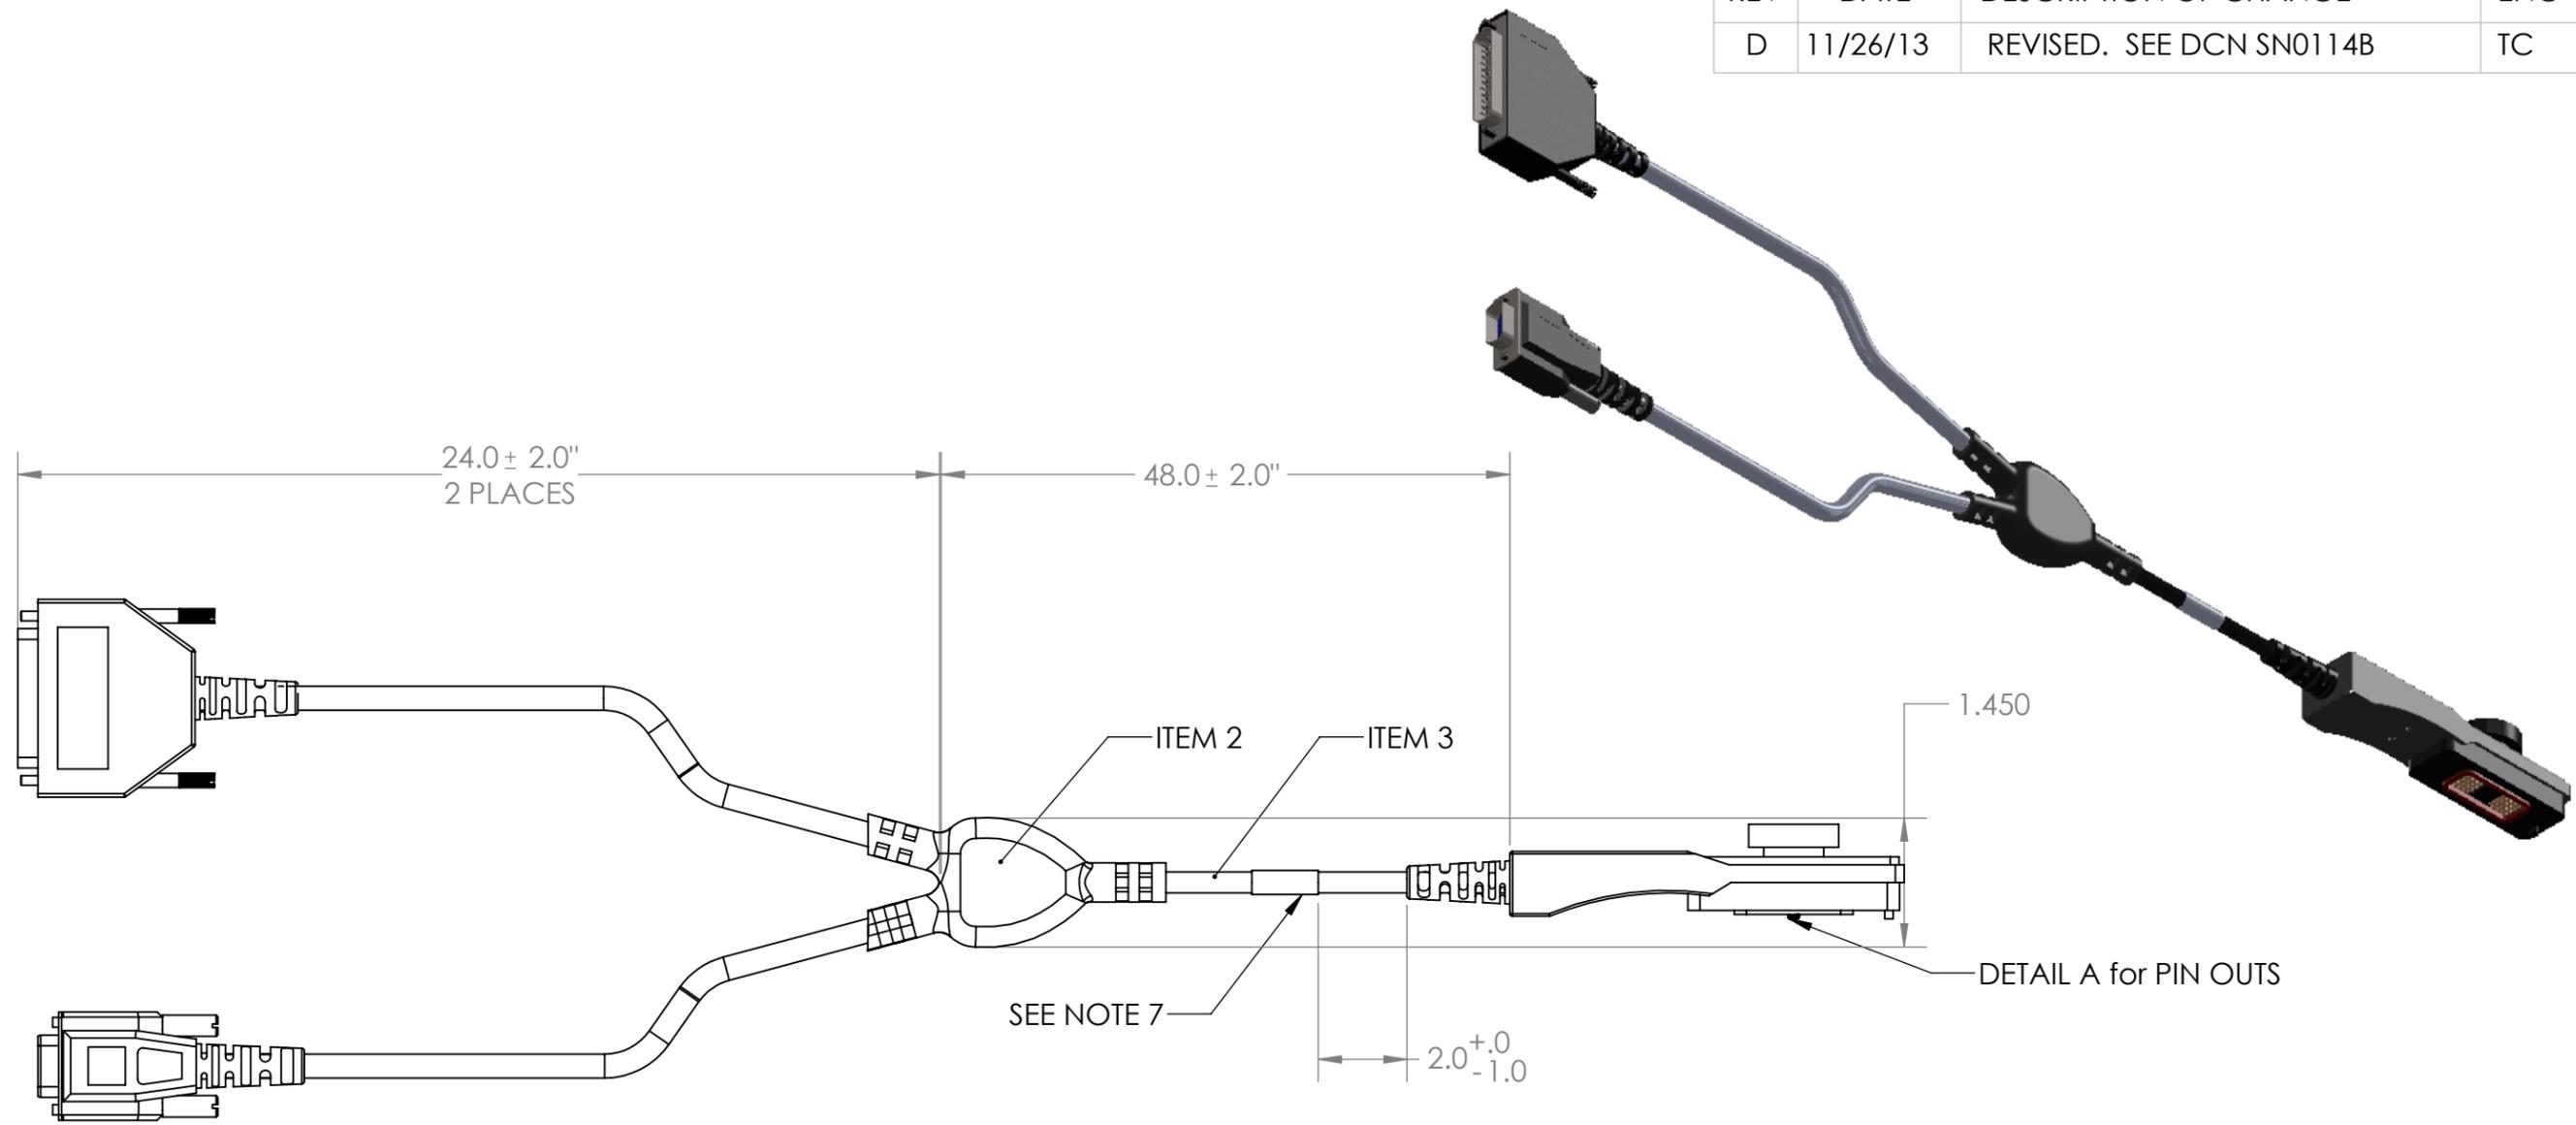

- NOTES:
- CABLE: 26 AWG, 12 CONDUCTOR, OD: 0.230 NOMINAL. POLYURETHANE INSULATION. OUTER SHIELD 38 AWG, TIN PLATED COPPER BRAID, 90% COVERAGE.
  - OVERMOLD MATERIAL: 90A POLYETHER-TYPE THERMOPLASTIC POLYURETHANE (TPU).
  - JACKET: BLACK MATTE FINISH.
  - E33, E34 IS CHASSIS GROUND
  - SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
  - CABLE ASSEMBLIES TO BE 100% TESTED FOR CONTINUITY, SHORTS AND INSULATION RESISTANCE (250VDC @ 100MOHM MINIMUM)
  - IDENTIFICATION: IDENTIFY ON PART THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. UOS PART MARKING ON THE WIRE IS PROHIBITED:  $2.0^{+.0} - 1.0$   
**PN: SN-273 REV X (REV MARKING PER PO)**  
**CAGE CODE: 1HJX9**  
**DATE OF MFGR: MM/YY**  
 USE ADHESIVE LABEL, WHITE WITH BLACK FONT.
  - REFERENCE SUPPLYNET FILE NUMBER SN0114.
  - MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
  - PLACE SHRINK TUBE AROUND EACH SOLDERED CONNECTION. CAP AND STOWE UNUSED WIRE.
  - EQUIVALENT REPLACEMENT FOR PN: 12041-7110-A1

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN: INCHES	DRAWN	RJB 05/02/13
TOLERANCES: .XX: ± 0.03	CHECKED	RJB 05/02/13
.XXX: ± 0.005	COMMENTS:	
ANGULAR: .X*: 1°	<b>PROPRIETARY AND CONFIDENTIAL</b>	
.XX*: 0.5°	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.	
BREAK EDGES: .005 - .020	CAGE CODE: 1HJX9	
FILLETS: .005 - .020	DO NOT SCALE DRAWING	
SURFACE FINISH:		
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009		
MATERIAL: SEE DRAWING NOTES		
FINISH: SEE DRAWING NOTES		

PART NUMBER: SN-273

**SupplyNet** 706 EXECUTIVE BLVD.  
SUITE B  
VALLEY COTTAGE, NY 10989

TITLE: **CABLE ASSY., AN/PRC-152 Cable Assembly MBHH DATA /Remote**

SIZE <b>B</b>	DWG. NO. <b>SN-273</b>	REV <b>D</b>
SCALE: NA	WEIGHT:	SHEET 1 OF 1