
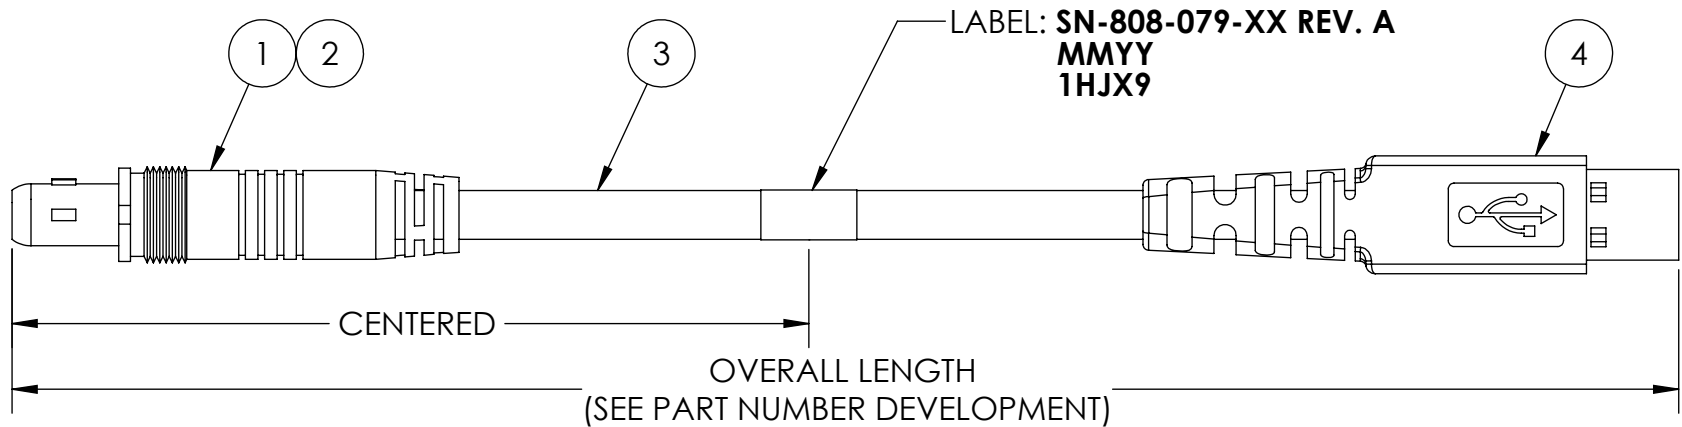
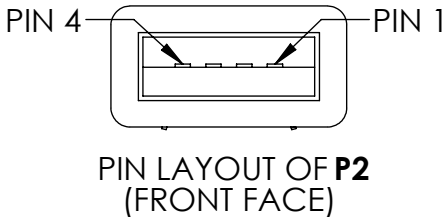


TABLE 1: WIRE RUN LIST		
P1	WIRE COLOR	P2
5	WHITE	2
4	GREEN	3
2	BLACK	4
SHELL	SHIELD	SHELL

TWISTED
PAIR

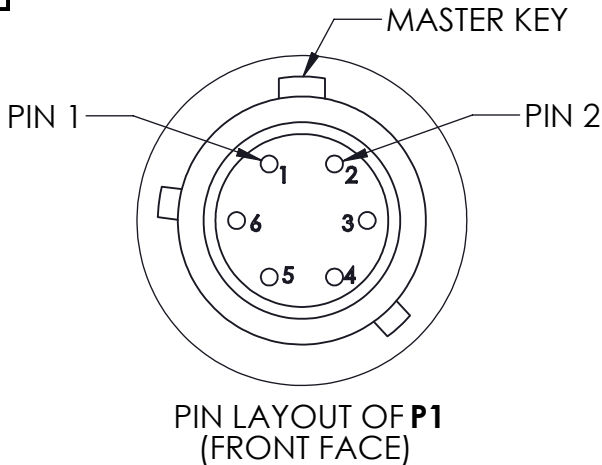

PART NUMBER DEVELOPMENT:

CABLE PART NUMBER: SN-808-079-XX

OVERALL LENGTH
(IN INCHES)

OMIT FOR DEFAULT LENGTH OF 5.0"

TOLERANCE:

± 0.5" FOR LENGTH ≤ 12.0"
± 1.8" FOR 12.0" < LENGTH ≤ 60.0"
± 3.0% FOR LENGTH > 60.0"

NOTES:

- SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
- CABLE ASSEMBLIES TO BE TESTED 100% FOR CONTINUITY, SHORTS, AND INSULATION RESISTANCE (250 VDC @ 100MOHM MINIMUM).
- MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
- WIRE PER TABLE 1.
- IDENTIFICATION: SEE DRAWING FOR TEXT AND LOCATION.USE ADHESIVE LABEL, WHITE WITH BLACK FONT.

REV	DATE	DESCRIPTION OF CHANGE	ENG
A	5/26/17	INITIAL RELEASE	LS



BILL OF MATERIALS			
ITEM NO.	PART NUMBER	QTY	NAME
1	807-309-06ZNU6-6PY	1	MALE NETT WARRIOR
2	BE-04	1	BANDING CLAMP
3	TBD	AR	CABLE, 4C USB WIRE
4	TBD	1	USB A MALE

REF. NUMBER: SN0458

SupplyNet

706 EXECUTIVE BLVD.
SUITE B
VALLEY COTTAGE, NY 10989

TITLE:
**GLENAIR NETT WARRIOR
PLUG TO USB A MALE**

SIZE B	DWG. NO. SN-808-079-XX	REV A
------------------	----------------------------------	-----------------

SCALE: NA	WEIGHT:	SHEET 1 OF 1
-----------	---------	--------------

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN: INCHES	LS	3/9/17
TOLERANCES: .XX: ± 0.03	CHECKED	RB
.XXX: ± 0.005		
ANGULAR: .X*: 1°	COMMENTS:	
.XX*: 0.5°		
BREAK EDGES: .005 - .020		
FILLET: .005 - .020		
SURFACE FINISH:		
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009		
MATERIAL: SEE DRAWING NOTES		
FINISH: SEE DRAWING NOTES		
DO NOT SCALE DRAWING		

CAGE CODE: 1HJX9