
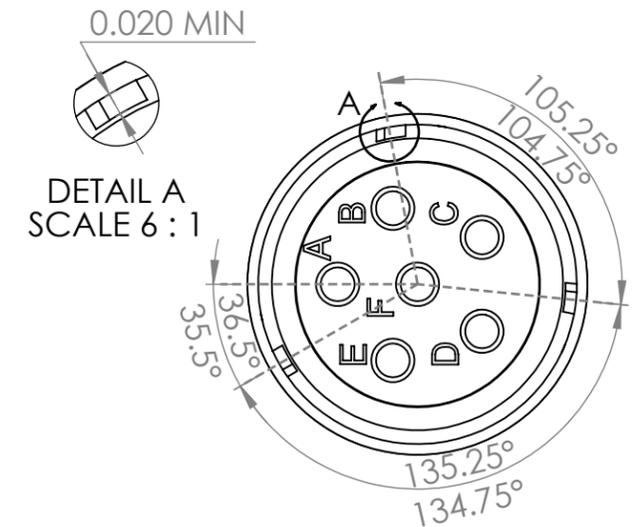
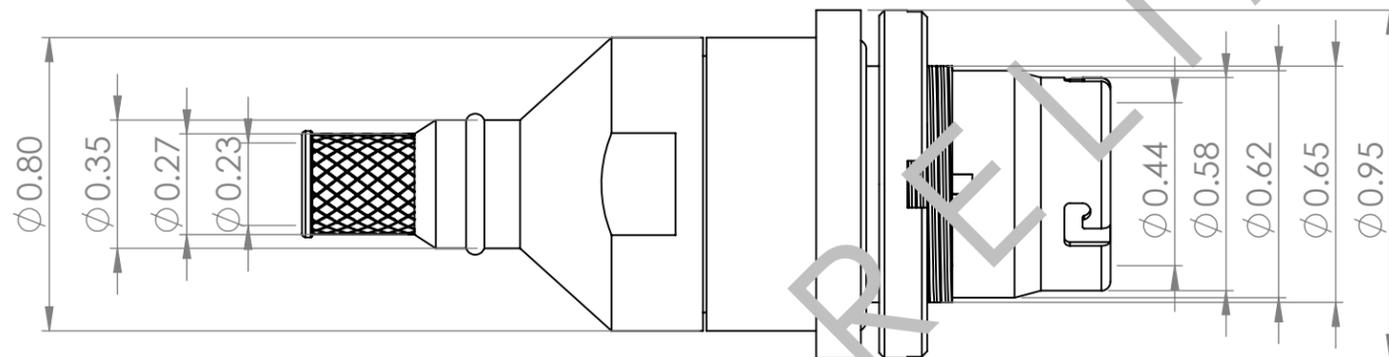
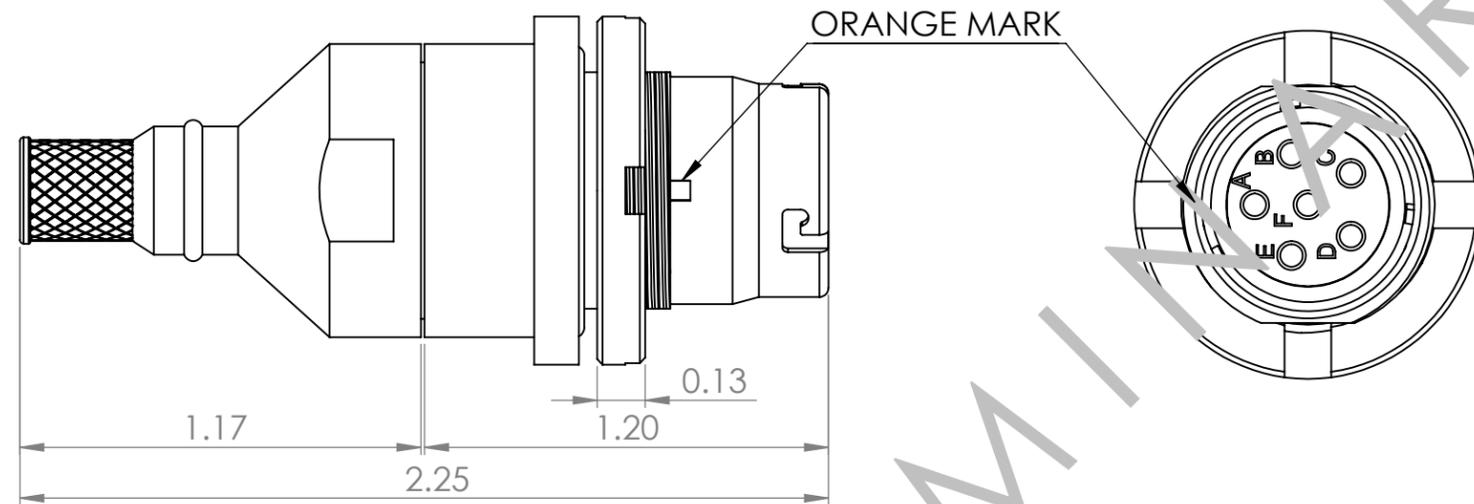
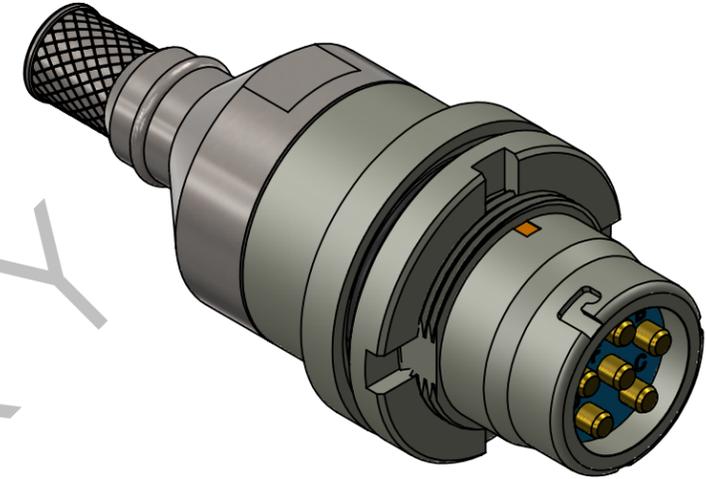


8 7 6 5 4 3 2 1

EXPLODED VIEW

REVISIONS			
REV	DESCRIPTION	DATE	ENG
1	PRELIM: FOR REVIEW	10/23/2024	CWA

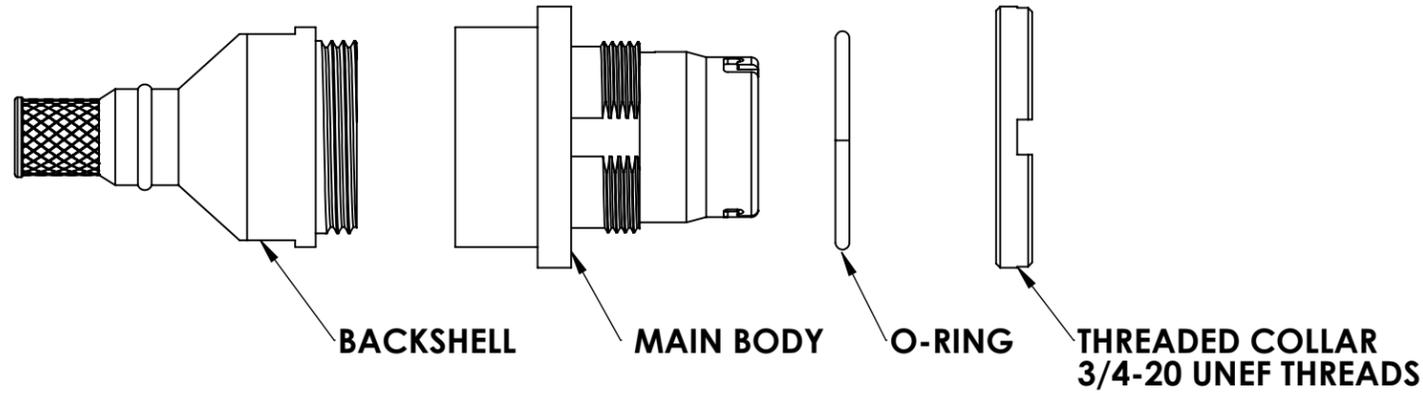

NOTES:

1. RoHS COMPLIANT PRODUCT.
2. MATERIALS:
 - A. SHELL-TYPE 303 STAINLESS STEEL, COND. A
 - CONTACT PINS-BRASS CDA 360-GOLD PLATING OVER ELECTOLESS NICKEL
 - SPANNER NUT-TYPE 303 STAINLESS STEEL, COND. A
3. CONNECTOR IS DESIGNED TO ELECTRICALLY PASS SIGNALS STRAIGHT THRU. SEE TABLE 1.
4. PACKAGING REQUIREMENTS:
 - A. EACH COMPLETED ASSEMBLY SHALL BE PACKAGED IN A ZIP POLYBAG.
 - B. CONNECTOR(S) SHALL BE PACKAGED TO PREVENT DAMAGE DURING SHIPPING. BUBBLE WRAP OR PROTECTIVE COVER MUST BE USED.
 - C. POLYBAG SHALL BE MARKED WITH SUPPLYNET LOGO, PRODUCT QR CODE, PART NUMBER, CAGE CODE, AND LOT NO, PER SN-STD-LBL REQUIREMENTS.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	REF. NUMBER: SN1277	
DIMENSIONS ARE IN: INCHES		DRAWN	CWA	10/23/2024	
TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005		CHECKED	RB	10/23/2024	
ANGULAR: .X°: 1° .XX°: 0.5°		COMMENTS:		TITLE: U-283/U CABLE MOUNT KIT	
BREAK EDGES: .005 - .020 FILLETS: .005 - .020 SURFACE FINISH:		<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.</p>		SIZE	DWG. NO.
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009				B	45-283-0928
MATERIAL: SEE DRAWING NOTES				REV	1
FINISH: SEE DRAWING NOTES				SCALE: NA	WEIGHT:
DO NOT SCALE DRAWING		CAGE CODE: 1HJX9		SHEET 1 OF 1	

8 7 6 5 4 3 2 1