
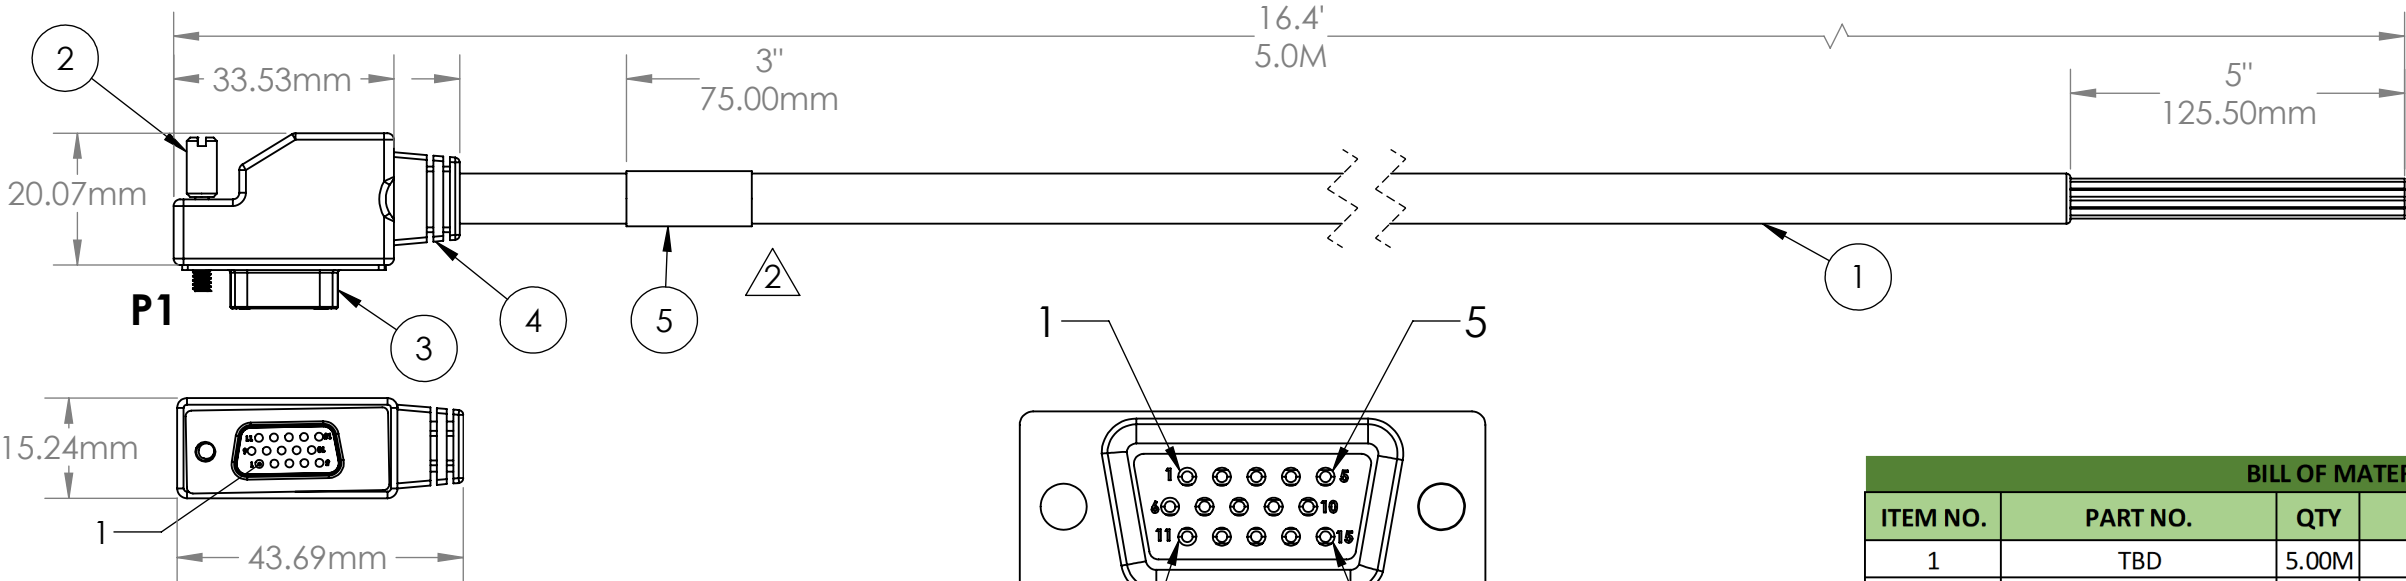



TABLE 1: WIRE RUN	
P1	WIRE COLOR
1	RED-COAX
2	RED-COAX SHIELD
3***	BROWN**
4	YELLOW
5*	BLACK/YELLOW
6	BLUE-COAX
7	WHITE/BROWN
8	YELLOW
9	BLACK**
10	WHITE/BLACK
11	BLUE-COAX SHIELD
12	BROWN**
13***	ORANGE
14	BLACK**
15	RED
SHELL	SHIELD

*THE YELLOW & BLACK/YELLOW PAIRED WIRE CAN BE SUBBED WITH THE YELLOW & WHITE/YELLOW PAIRED WIRE
**ENSURE THAT THE BROWN WIRE ON PIN 3 IS FROM THE BROWN & WHITE/BROWN PAIR
ENSURE THAT THE BLACK WIRE ON PIN 9 IS FROM THE BLACK & WHITE/BLACK PAIR
ENSURE THE BROWN WIRE ON PIN 12 IS THE SINGLE WIRE - NOT PAIRED
ENSURE THE BLACK WIRE ON PIN 14 IS THE SINGLE WIRE - NOT PAIRED
***THE BROWN WIRE ON PIN 3 & ORANGE WIRE ON PIN 13 ARE JUMPED

REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	INITIAL RELEASE	09/05/2024	CWA
B	UPDATED NOTES & DRAWING NUMBER	10/30/2024	CWA



- NOTES:
- WIRING SHALL BE DONE IN ACCORDANCE WITH TABLE 1 WIRE RUN LIST.
 - MARKING REQUIREMENTS:
 - A. LABEL(S) SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-130 AS APPLICABLE.
 - B. LABEL(S) SHALL BE WHITE WITH BLACK TEXT.
 - C. LABEL(S) SHALL BE PLACED WHERE SHOWN IN DRAWING.
 - D. ADHESIVE WRAP AROUND LABEL(S) MAY BE USED.
 - E. LABEL(S) SHALL BE MARKED WITH THE BELOW INFORMATION ONLY. REV MARKING PER PO. (YYYY = YEAR OF MFG, MM = MONTH OF MFG, DD, DAY OF MFG, XXXXX = PO NUMBER)
PN: SN-426-0141-030 REV. X
CAGE: 1HJX9
LOT: TYYYYMMDDPXXXXX
 - PACKAGING REQUIREMENTS:
 - A. EACH COMPLETED ASSEMBLY SHALL BE PACKAGED IN A ZIP POLYBAG.
 - B. CONNECTOR(S) SHALL BE PACKAGED TO PREVENT DAMAGE DURING SHIPPING. BUBBLE WRAP OR PROTECTIVE COVER MUST BE USED.
 - C. POLYBAG SHALL BE MARKED WITH SUPPLYNET LOGO, PRODUCT QR CODE, PART NUMBER, CAGE CODE, AND LOT NO, PER SN-STD-LBL REQUIREMENTS.
 - WORKMANSHIP REQUIREMENTS:
 - A. MANUFACTURE TO IAW/WHMA A-620 CLASS 2 REQUIREMENTS.
 - B. SOLDERING SHALL BE COMPLIANT WITH IAW J-STD-001 AS APPLICABLE.
 - C. CONNECTOR(S) AND WIRE SHALL BE FREE FROM ANY SCRATCHES, CHIPS, AND DEFECTS.
 - INSPECTION REQUIREMENTS:
 - A. EACH COMPLETED ASSEMBLY TO BE 100% TESTED FOR SHORTS, CONTINUITY, AND JACKET RESISTANCE (250V @100MOHM MIN.)
 - B. INSPECT TO IPC/WHMA A-620 CLASS 2 REQUIREMENTS.

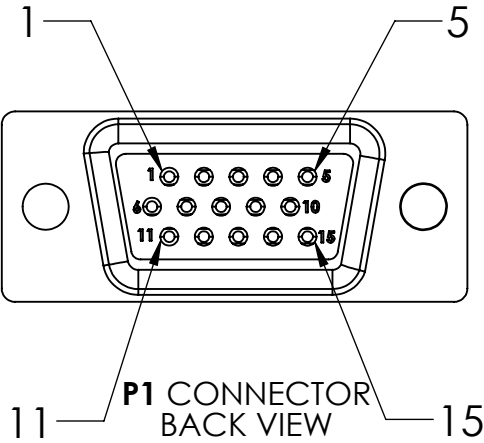

BILL OF MATERIALS			
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION
1	TBD	5.00M	CABLE
2	F17-821-7611	1	THUMB SCREW
3	30-820-0	1	CONN, HD D-SUB 15 POS (F) PLUG
4	4209-OM-01	1	BLACK OVERMOLD, 90°
5	4209-WA-01	1	WRAP AROUND LABEL

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>SupplyNet</div>		<div>DESIGN ENGINEERING MANUFACTURING</div>		
DIMENSIONS ARE IN: INCHES		DRAWN	CWA	09/04/2024	<div>TITLE:</div> <div>PLGR CABLE UNTERMINATED, 5 METERS</div>			
TOLERANCES: .XX: ± 0.03		CHECKED	RB	09/04/2024				
ANGULAR: .X*: 1°		COMMENTS:						
.XX*: 0.5°								
BREAK EDGES: .005 - .020								
FILLETS: .005 - .020								
SURFACE FINISH:		<div>PROPRIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.</div>						
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009		SIZE	DWG. NO.		REV			
MATERIAL: SEE DRAWING NOTES		B	SN-426-0141-030		B			
FINISH: SEE DRAWING NOTES		CAGE CODE: 1HJX9	SCALE: NA	WEIGHT:		SHEET 1 OF 1		
DO NOT SCALE DRAWING								