

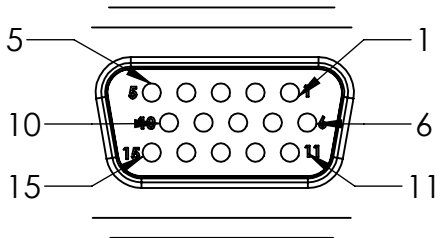



TABLE 1: WIRE RUN		
P1	WIRE COLOR	P2
5	BLACK	2
2	RED	14
3	BROWN	15
1, 4, 6, 8		N/C
N/C		3, 13
SHELL	SHIELD	SHELL



DETAIL B
SCALE 2 : 1

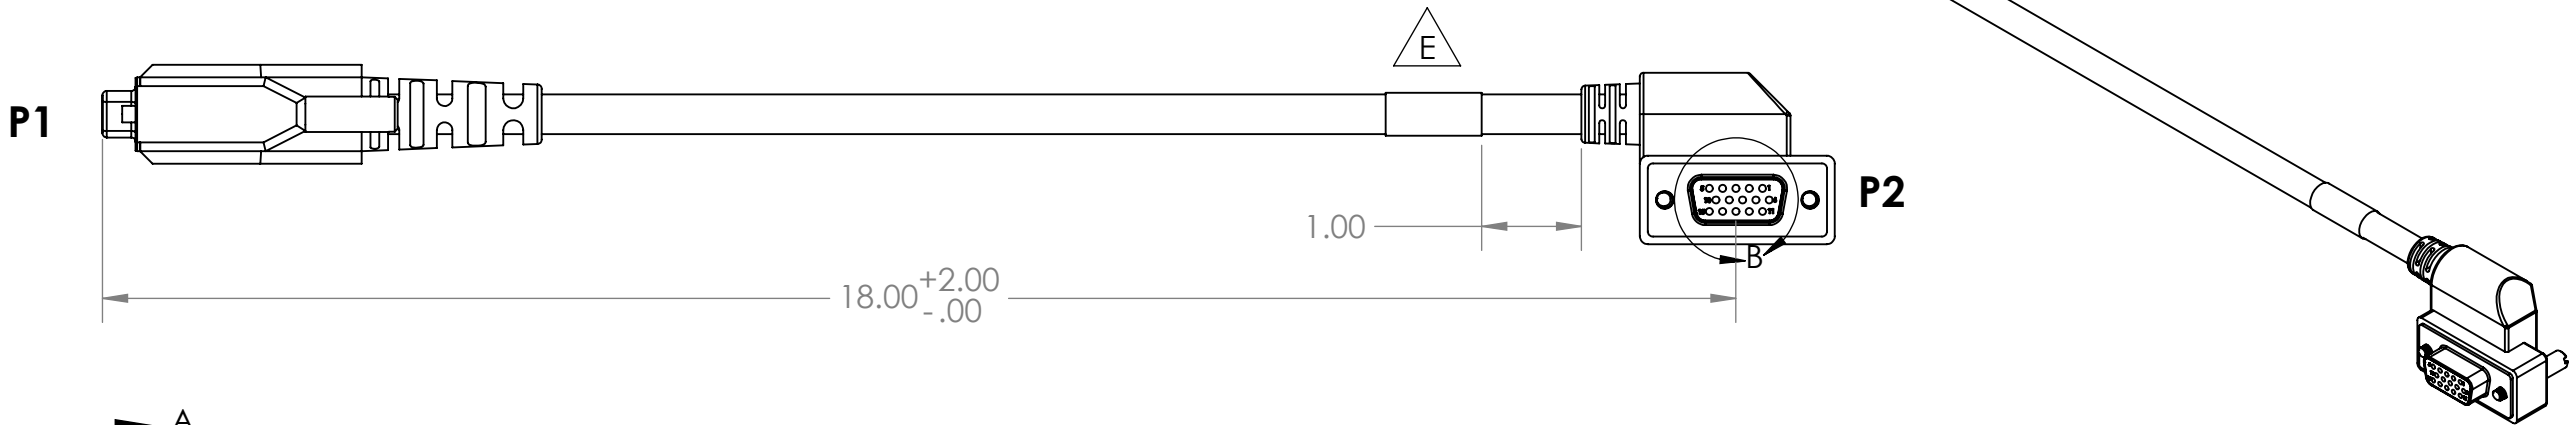

SECTION A-A
SCALE 1 : 1

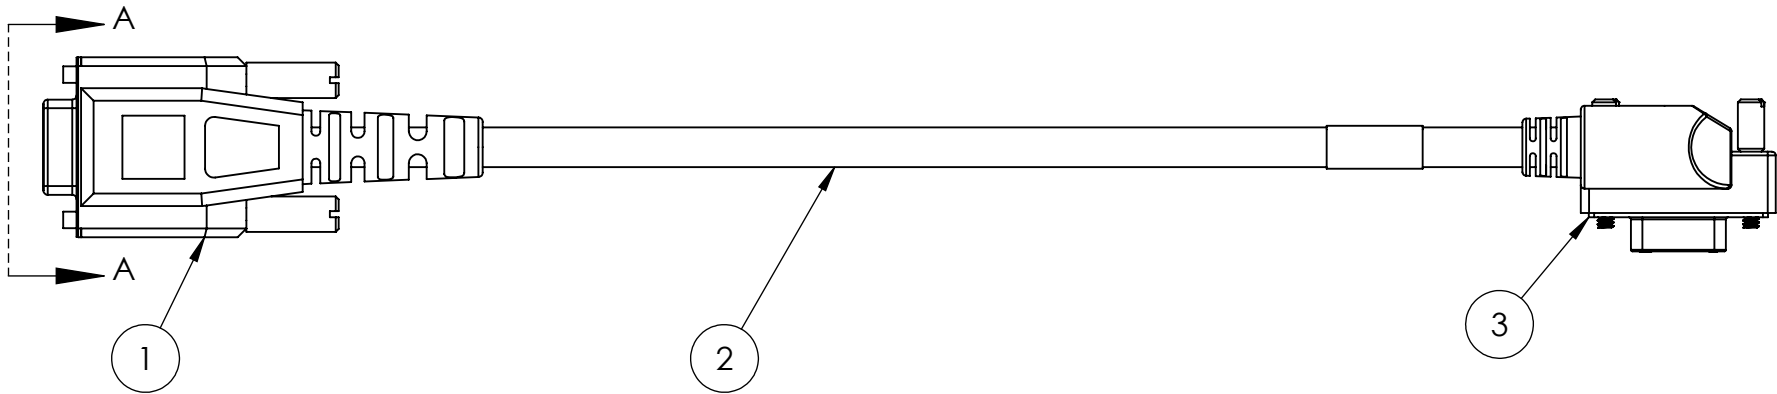



NOTES:

1. WIRING SHALL BE DONE IN ACCORDANCE WITH TABLE 1 WIRE RUN LIST.
2. MARKING REQUIREMENTS:
 - A. LABELS SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-130 AS APPLICABLE.
 - B. LABELS SHALL BE WHITE WITH BLACK TEXT.
 - C. LABELS SHALL BE PLACED WHERE SHOWN IN DRAWING.
 - D. ADHESIVE WRAP AROUND LABEL MAY BE USED.
3. SOLDERING: IAW IPC-J-STD-001 CLASS 2 AS APPLICABLE
4. ASSEMBLY TO BE 100% TESTED FOR SHORTS, CONTINUITY, AND JACKET RESISTANCE (250V @ 100MOHM MIN.)
5. MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.\
6. MFG CODE: 154

REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	INITIAL RELEASE	6/29/2023	MOB

BILL OF MATERIALS			
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION
1	500-109	1	DB9 FEMALE
2	X-265B	3.1M	5C, AWG 26, BRAIDED/FOIL SHIELD, PU JKT
3	09HD15	1	HD15 FEMALE

UNLESS OTHERWISE SPECIFIED:		NAME		DATE					
DIMENSIONS ARE IN: INCHES TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005 ANGULAR: .X°: 1° .XX°: 0.5° BREAK EDGES: .005 - .020 FILLET: .005 - .020 SURFACE FINISH: GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009 MATERIAL: SEE DRAWING NOTES FINISH: SEE DRAWING NOTES DO NOT SCALE DRAWING		DRAWN	MOB	6/29/2023		TITLE: DAGR TO PC CABLE, 18 INCHES			
		CHECKED	RB	6/29/2023					
		COMMENTS:							
				PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.		SIZE B	DWG. NO. SN-987-5012-018		REV A
		CAGE CODE: 1HJX9		SCALE: NA		WEIGHT:		SHEET 1 OF 1	