


TABLE 1: WIRE RUN						
P1	WIRE COLOR	P2				
7	BLACK	A B				
3	RED					
N/C	BROWN	С				
2	BLUE	F E				
5	GREEN					
SHELL	SHIELD	SHELL				

ITEM NO. LABEL TEXT NOTES	
SN-2039 REV. X SEE NOTE 2.	
A CAGE: 1HJX9 REV. MARKING PER P	PER PO.
MFD: MM/YY	

CAP AND STOW ANY UNUSED WIRES.

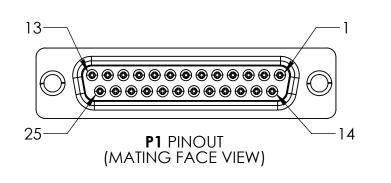



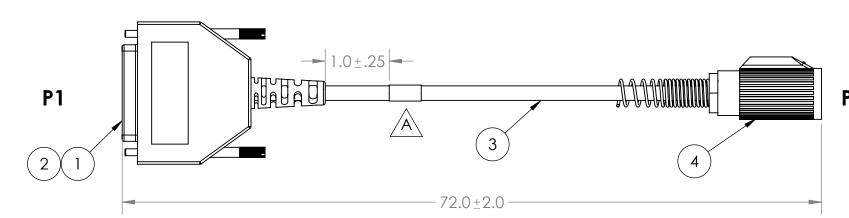

REVISIONS					
REV.	DESCRIPTION	DATE	ENG		
Α	INITIAL REV.	11/07/22	МОВ		



BILL OF MATERIALS					
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION		
1	DE25STS	1	DB25 FEMALE, SOCKET CONTACTS		
2	MHDETZK25BKK	1 DB25 BACKSHELL, BLACK			
3	51395	72"	CABLE: AWG, 22, 6C, SHIELDED, PU JACKET, .226		
			DIA. RoHS COMPLIANT		
4	SN-126-LP-702	1	M55116-4/3, 6 POS. CIRCULAR CONNECTOR WITH		
		_	FLUSH CONTACTS		

				REF.	NUN	MBER: SN0954		
UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Cur	mlvM	706 EXECU	TIVE BLV	D
DIMENSIONS ARE IN: INCHES	DRAWN	MOB	B 11/07/22) Juj	SupplyNet		SUITE B VALLEY COTTAGE, NY 10989	
TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005	CHECKED	RB	11/07/22	TITLE:				
ANGULAR: .X°: 1° .XX°: 0.5° BREAK EDGES: .005020 FILLETS: .005020 SUFACE FINISH:	COMMENTS:		RT-1523 ASYNC RS-232 DATA CABLE, 6 FT.					
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC.		SIZE	DWG			REV	
material: See drawing notes			В		SN-2039		Α	
FINISH: SEE DRAWING NOTES	IS PROHIBITED.	OHIBITED.				31 1 2007		, , ,
DO NOT SCALE DRAWING	CAGE C	ODE: 1	HJX9	SCAI	E: NA	WEIGHT:	SHEE	T 1 OF 1

NOTES:

- WIRING SHALL BE DONE IN ACCORDANCE WITH TABLE 1 WIRE RUN LIST.
- MARKING REQUIREMENTS:
 - LABELS SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-130 AS APPLICABLE. LABELS SHALL BE WHITE WITH BLACK TEXT. REFER TO TABLE 2 FOR LABEL TEXT.

 - LABELS SHALL BE PLACED WHERE SHOWN IN DRAWING. ADHESIVE LINED WRAP AROUND LABEL MAY BE USED.
- SOLDERING: IAW IPC-J-STD-001 CLASS 2 AS APPLICABLE
- ASSEMBLY TO BE 100% TESTED FOR SHORTS, CONTINUITY, AND JACKET RESISTANCE (250V @ 100MOHM MIN.)
- MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.