
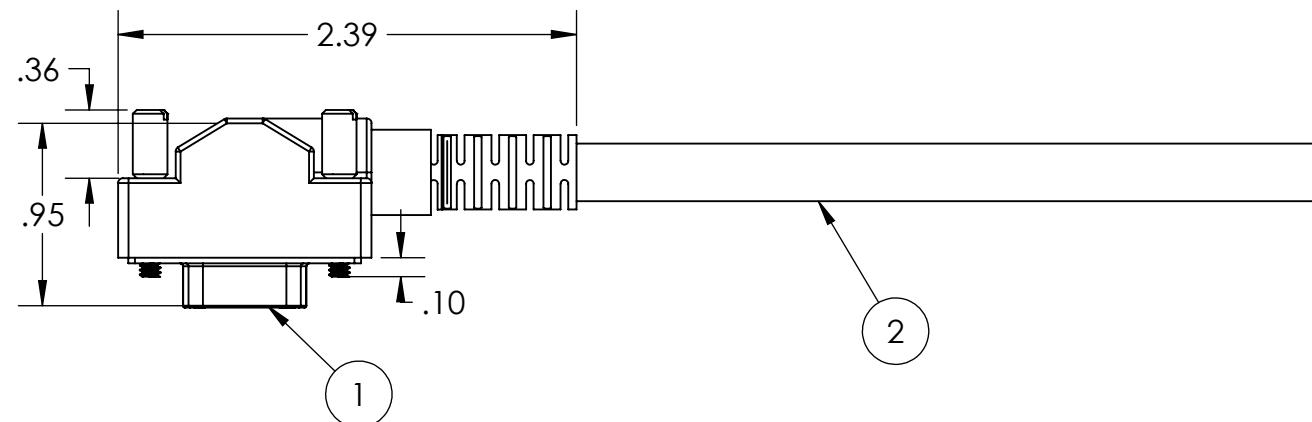


TABLE 1: WIRE RUN LIST		
P1 HD15	WIRE COLOR	SIGNAL
1	RED COAX	1PPS_IN
2	RED COAX SHIELD	1PPS_IN_RTN
3	BROWN	GND
6	BLUE COAX	PPS_OUT_COM1
11	BLUE COAX SHIELD	PPS_OUT_RTN
14	BLACK	COM1_XMT
15	RED	COM1_RCV
SHELL	SHIELD	SHIELD

*J-HOOK AND TUBE
ANY UNUSED WIRES

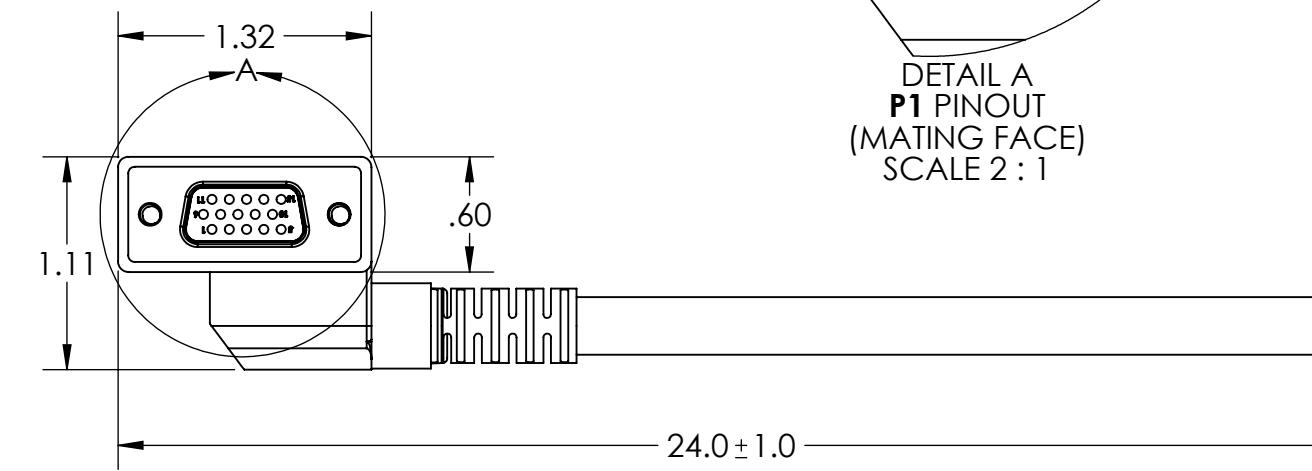

NOTES:

1. WIRE FUNCTION: SEE TABLE 1 WIRE RUN LIST.
2. CABLE LENGTH: 24.0 IN \pm 1.0 IN.
3. ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS, AND JACKET RESISTANCE.
4. SOLDERING: IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
5. IDENTIFICATION: BAG AND IDENTIFY ON PACKAGING THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. PART MARKING ON THE WIRE IS PROHIBITED.

PN: SN-C7006B0092-C1-02 REV. X ("-XX" & REV. "X" AS PER PO.)


CAGE CODE: 1HJX9

MFD: MM/YY

6. REFERENCE SUPPLYNET FILE NUMBER SN0783.

7. MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.

REVISIONS			
REV.	DESCRIPTION	DATE	ENG
1	UNDER CUSTOMER REVIEW	05/24/2021	MOB

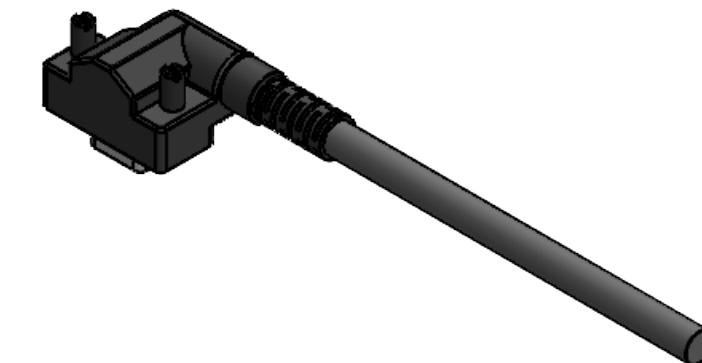

BILL OF MATERIALS			
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION
1	609-4045-ND	1	HD15F W/ OVER-MOLD
2	TBD	AR	CABLE: 13C, 3 TWISTED PAIRS, 2 50 OHM COAX, 28 AWG, TPU JACKET, SHIELDED, OD: 0.3in

UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE
DIMENSIONS ARE IN: INCHES	MOB	5/24/2021	
TOLERANCES: XX: \pm 0.03	CHECKED		
XXX: \pm 0.005	RB	5/24/2021	
ANGULAR: X°: 1°	COMMENTS:		
XX°: 0.5°			
BREAK EDGES: .005 - .020	PROPRIETARY AND CONFIDENTIAL		
FILLETS: .005 - .020	THE INFORMATION CONTAINED IN THIS		
SURFACE FINISH:	DRAWING IS THE SOLE PROPERTY OF		
	SUPPLYNET, INC. ANY REPRODUCTION		
GEOMETRIC TOLERANCING	IN PART OR AS A WHOLE WITHOUT THE		
PER: ASME Y14.5 -2009	WRITTEN PERMISSION OF SUPPLYNET INC.		
MATERIAL: SEE DRAWING NOTES	IS PROHIBITED.		
FINISH: SEE DRAWING NOTES			
DO NOT SCALE DRAWING	CAGE CODE: 1HJX9	SCALE: NA	WEIGHT:
		SHEET 1 OF 1	

REF. NUMBER: SN0783

SupplyNet
706 EXECUTIVE BLVD.
SUITE B
VALLEY COTTAGE, NY 10989

TITLE: DAGR J2, HD15F,
CABLE ASSEMBLY
UNTERMINATED

SIZE B DWG. NO. SN-C7006B0092-C1-02 REV 1
SCALE: NA WEIGHT: SHEET 1 OF 1