
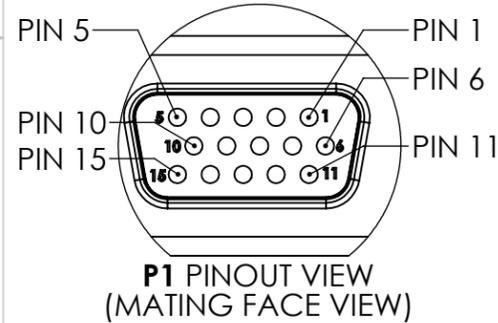


TABLE 1: WIRE RUN LIST	
P1	WIRE COLOR
3	WHITE
N/C	BLACK
14	ORANGE
N/C	BLUE
15	RED
N/C	GREEN
N/C	SHIELD

TABLE 2: WIRE LENGTH TABLE		
"-XXX" FROM P/N	"XX" LENGTH DIMENSION (INCHES.)	TOLERANCE (INCHES)
02	24"	+2.0 -2.0
04	48"	+2.0 -2.0
05	60"	+6.0 -2.0

REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	INITIAL RELEASE	11/25/2025	CWA

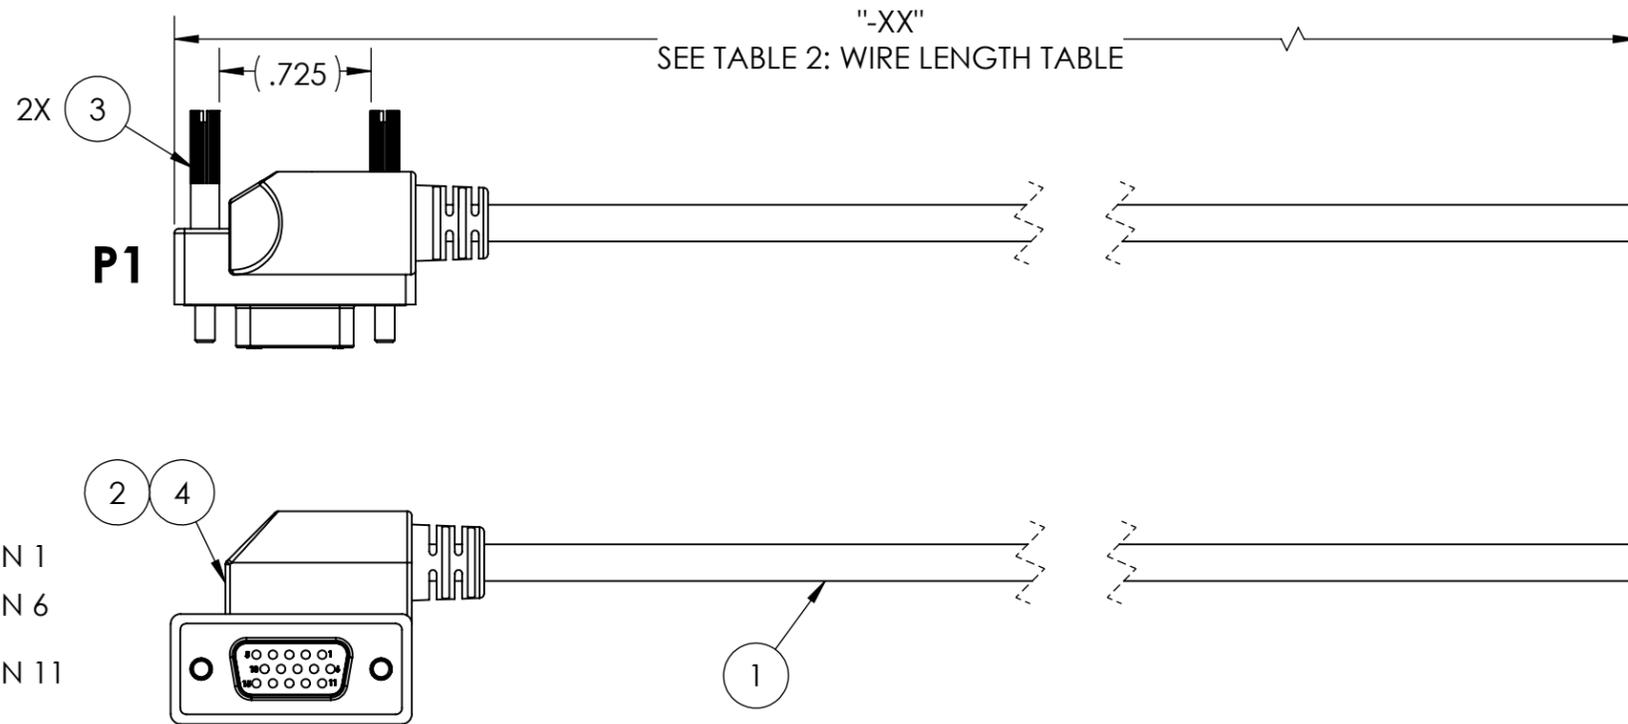

BILL OF MATERIALS			
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION
1	M3432-06LHE(2/22X3)SJ0345	AR	CABLE, 6C, AWG 22, BRAIDED SHIELD, TPE JKT, OD .345 IN. NOM
2	DB15SHD	1	D-SUB, PLUG, 15 POS. SOCKETS.
3	F178217611-BLK	2	THUMBSCREWS, 21.7MM, SS, BLK.
4	P1 MOLD	1	J1 DAGR MOLD (1DOT)

**NOTES:**

- WIRING SHALL BE DONE IN ACCORDANCE WITH TABLE 1 WIRE RUN LIST.
- PACKAGING REQUIREMENTS:
  - EACH COMPLETED ASSEMBLY SHALL BE PACKAGED IN A ZIP POLYBAG.
  - CONNECTOR(S) SHALL BE PACKAGED TO PREVENT DAMAGE DURING SHIPPING. BUBBLE WRAP OR PROTECTIVE COVER MUST BE USED.
  - POLYBAG SHALL BE MARKED WITH SUPPLYNET LOGO, PRODUCT QR CODE, PART NUMBER, CAGE CODE, AND LOT NO, PER SN-STD-LBL REQUIREMENTS.
- WORKMANSHIP REQUIREMENTS:
  - MANUFACTURE TO IAW/WHMA A-620 CLASS 2 REQUIREMENTS.
  - SOLDERING SHALL BE COMPLIANT WITH IAW J-STD-001 AS APPLICABLE.
  - CONNECTOR(S) AND WIRE SHALL BE FREE FROM ANY SCRATCHES, CHIPS, AND DEFECTS.
- INSPECTION REQUIREMENTS:
  - EACH COMPLETED ASSEMBLY TO BE 100% TESTED FOR SHORTS, CONTINUITY, AND JACKET RESISTANCE (250V @100MOHM MIN.)
  - INSPECT TO IPC/WHMA A-620 CLASS 2 REQUIREMENTS.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
DIMENSIONS ARE IN: INCHES		DRAWN	CWA 11/18/2025	
TOLERANCES: .XX: ± 0.03		CHECKED	RB 11/18/2025	<b>TITLE:</b> <b>SN-987-J1-SUB-02 DAGR J1 DATA CABLE RIGHT ANGLE LOW PROFILE DONGLE</b>
ANGULAR: .X°: 1°		COMMENTS:		
BREAK EDGES: .005 - .020		<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.</p>		<b>SIZE</b> DWG. NO. <b>B</b> <b>SN-987-J1-SUB-XX</b> <b>REV</b> <b>A</b>
FILLETS: .005 - .020		<b>CAGE CODE: 1HJX9</b>		
SURFACE FINISH:		DO NOT SCALE DRAWING		SCALE: NA WEIGHT: SHEET 1 OF 1
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009				
MATERIAL: SEE DRAWING NOTES				
FINISH: SEE DRAWING NOTES				