



| REV | DATE | DESCRIPTION OF CHANGE | ENG |
|---|---|---|---|
| A | 4/19/2019 | INITIAL RELEASE | LS |

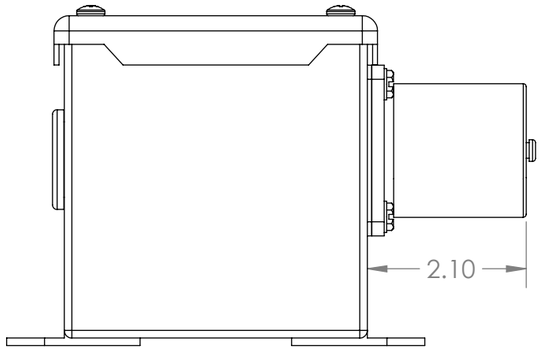


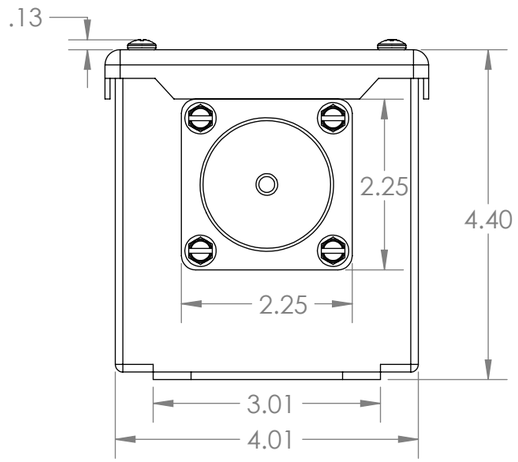


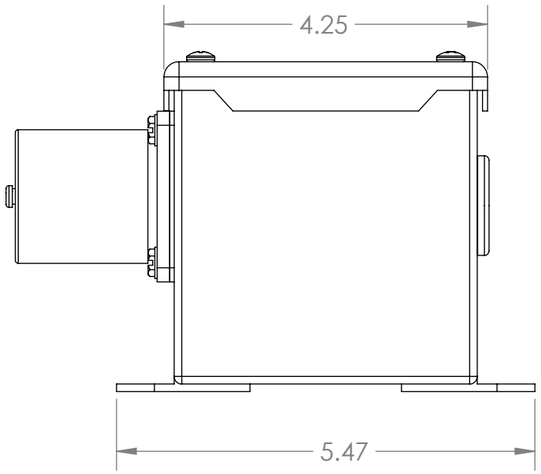

**MOUNTING HOLE DIMENSIONS:**

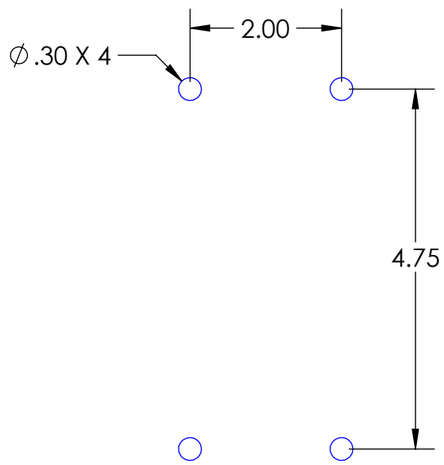

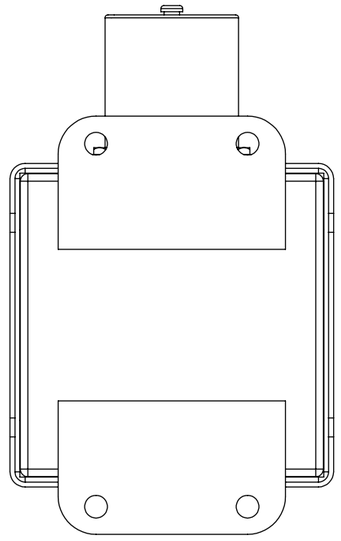**INCLUDES LANYARD FOR DUST CAP** (NOT SHOWN)

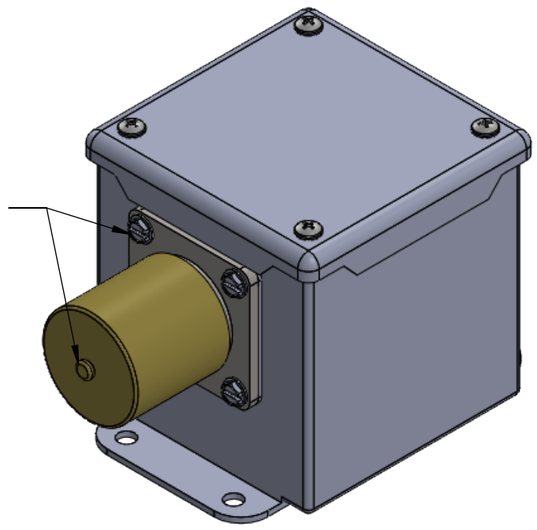

**NOTES:**

1. WATERPROOF MOUNTING BOX
2. MATERIALS: INSULATOR: MOLDED RUBBER, CONTACTS: COPPPER ALLOY WITH ELECTROLESS NICKEL FINISH, DUST CAP: POLYCARBONATE
3. ELECTRICAL CHARACTERISTICS: 24-28VDC, 500 AMP CONTINUOUS DUTY, 1000 AMPS OVERLOAD CAPACITY (6 MINUTES), 0.5mΩ MAXIMUM CONTACT RESISTANCE
4. RESISTANT TO CORROSION FROM PETROLEUM PRODUCTS, FUNGUS, AND OZONE
5. MANUFACTURED TO MEET OR EXCEED MIL-C-62122(B)
6. CONFORMS TO NATO STANAG 4074
7. MATES TO SN-215 (NATO PLUG)

REF. NUMBER: SN0494

| UNLESS OTHERWISE SPECIFIED: | | NAME | DATE |
|---|---|---|---|
| DIMENSIONS ARE IN: INCHES<br>TOLERANCES: .XX: ± 0.03<br>.XXX: ± 0.005<br>ANGULAR: .X°: 1°<br>.XX°: 0.5°<br>BREAK EDGES: .005 - .020<br>FILLETS: .005 - .020<br>SUFACE FINISH:<br><br>GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009 | DRAWN | LS | 4/19/19 |
| | CHECKED | RB | 4/19/19 |
| | COMMENTS: | | |
| MATERIAL: SEE DRAWING NOTES | | | |
| FINISH: SEE DRAWING NOTES | | | |
| DO NOT SCALE DRAWING | | | |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.

SupplyNet
706 EXECUTIVE BLVD.
SUITE B
VALLEY COTTAGE, NY 10989

TITLE:

# NATO IN-VEHICLE RECEPTABLE WITH MOUNTING BOX

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | SN-225 | A |

**CAGE CODE: 1HJX9** | SCALE: NA | WEIGHT: | SHEET 1 OF 1