
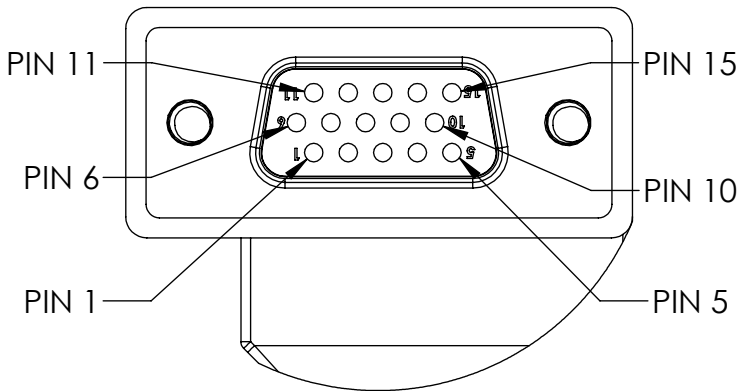
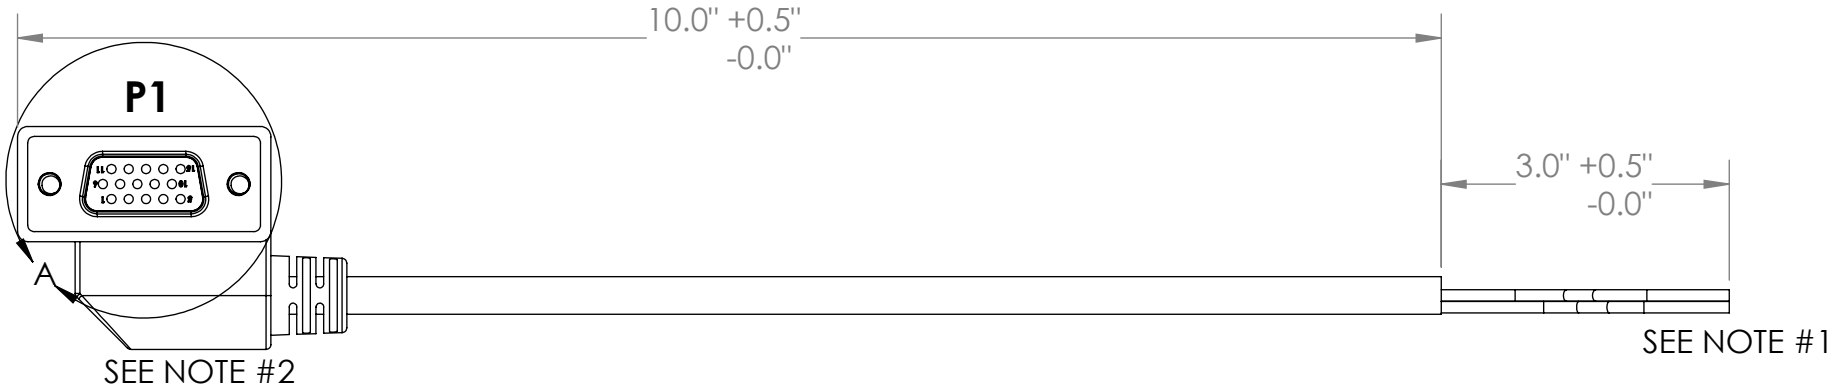


TABLE 1: WIRING		
P1	SIGNAL	WIRE COLORS
1	PPS_IN	GREEN
3	GND	BLACK
6	PPS_OUT	WHITE
14	TX	ORANGE
15	RX	RED
SHELL	SHIELD	SHIELD

REV	DATE	DESCRIPTION OF CHANGE	ENG
1	03/26/2019	UNDER CUSTOMER REVIEW	LS

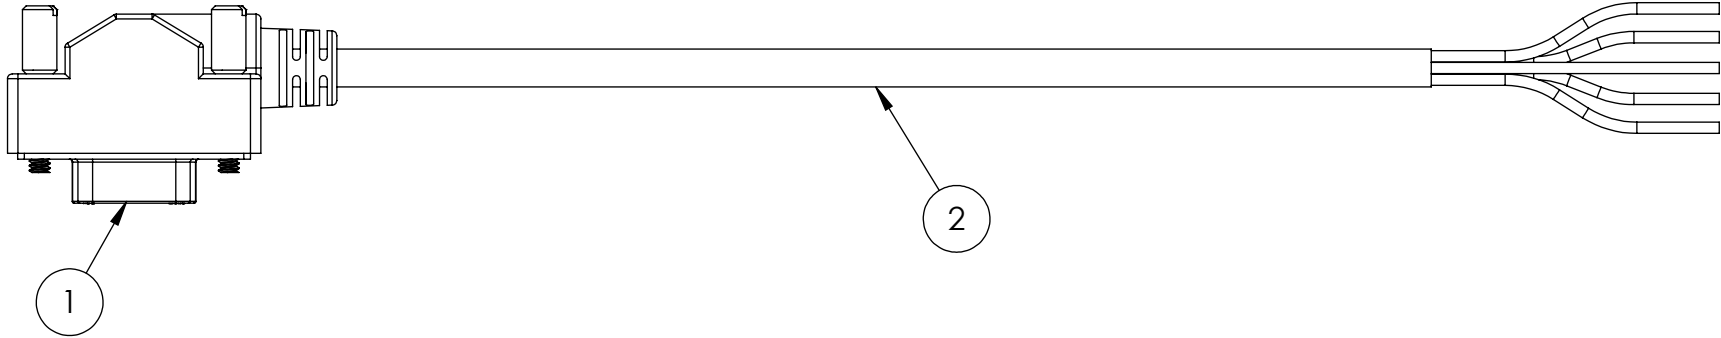

- NOTES:**
1. STRIP JACKET 3.0"
 2. BLACK OVERMOLD ON P1 CONNECTOR
 3. BUILD TO IPC/WHMA-A-620 STANDARDS OR MOST CURRENT VERSION
 4. ASSEMBLIES TO BE 100% TESTED FOR CONTINUITY AND SHORTS

DETAIL A
SCALE 2 : 1

TABLE 2: BILL OF MATERIALS			
ITEM NO.	PART NO	QTY	NAME/DESCRIPTION
1	TBD	1	HD15 Female Connector Right Angle, Over-Molded, Low Profile
2	TBD	14"	24 AWG x 6C 5mm OD Cable

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989		
DIMENSIONS ARE IN: INCHES TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005 ANGULAR: .X°: 1° .XX°: 0.5° BREAK EDGES: .005 - .020 FILLET: .005 - .020 SURFACE FINISH: GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009 MATERIAL: SEE DRAWING NOTES FINISH: SEE DRAWING NOTES DO NOT SCALE DRAWING	DRAWN	LS	3/26/2019	SupplyNet TITLE: DAGR J2 GPS CABLE FLYING LEADS ASSY., 13" SIZE DWG. NO. REV B SN-987-J2-HD15F-SUB 1 SCALE: NA WEIGHT: SHEET 1 OF 1		
	CHECKED	RB	3/26/2019			
	COMMENTS:					
	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.					
		CAGE CODE: 1HJX9				