
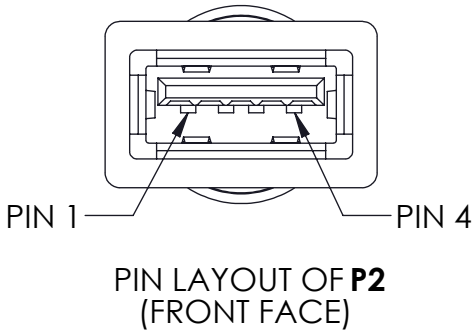
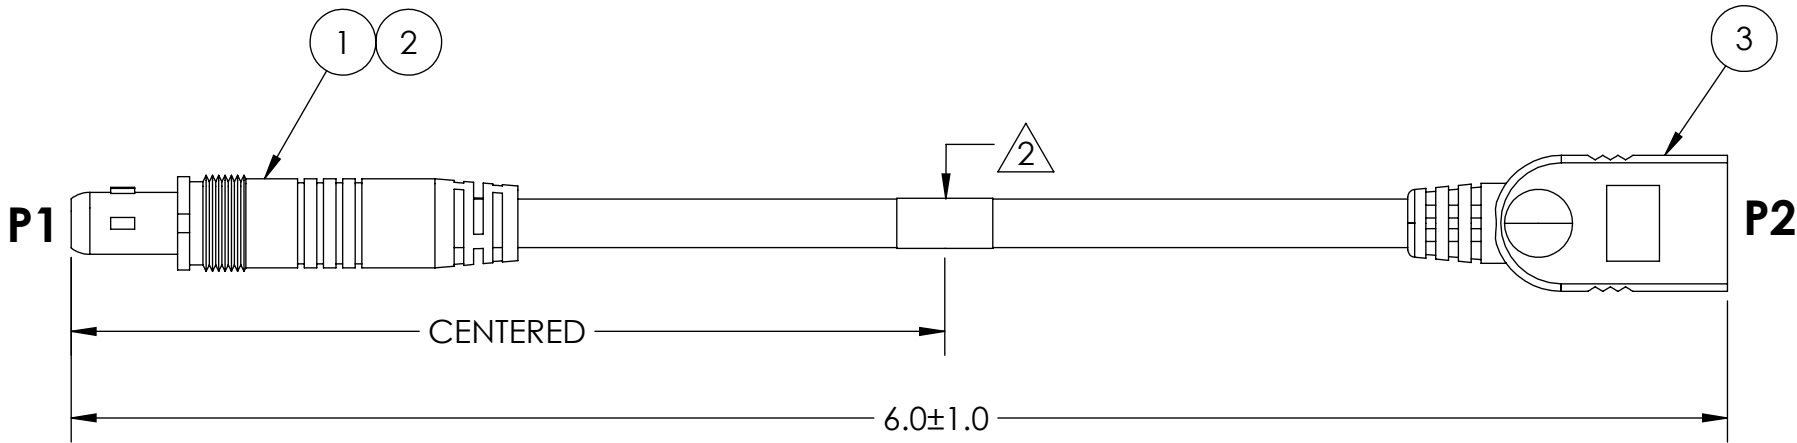


TABLE 1: WIRE RUN LIST		
P1	WIRE COLOR	P2
3	RED	1
5	WHITE	2
4	GREEN	3
2, 6	BLACK	4
SHELL	SHIELD	SHELL

TWISTED
PAIR

REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	INITIAL RELEASE	06/23/2025	CWA

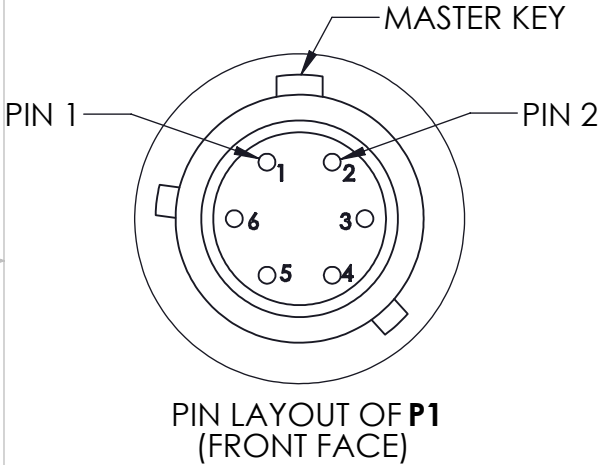

- NOTES:**
- WIRING SHALL BE DONE IN ACCORDANCE WITH TABLE 1 WIRE RUN LIST.
 - MARKING REQUIREMENTS:
 - LABEL(S) SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-130 AS APPLICABLE.
 - LABEL(S) SHALL BE WHITE WITH BLACK TEXT.
 - LABEL(S) SHALL BE PLACED WHERE SHOWN IN DRAWING.
 - ADHESIVE WRAP AROUND LABEL(S) TO BE USED.
 - LABEL SHALL BE MARKED WITH THE BELOW INFORMATION ONLY. REV MARKING PER PO.
(YYYY=YEAR OF MFG, MM=MONTH OF MFG, DD=DAY OF MFG, XXXX=PO NUMBER)
PN: SN-8071-3628 REV.X (REV MARKING PER PO)
CAGE: 1HJX9
LOT: TYYYYMMDDPXXXXX
 - PACKAGING REQUIREMENTS:
 - EACH COMPLETED ASSEMBLY SHALL BE PACKAGED IN A ZIP POLYBAG.
 - CONNECTOR(S) SHALL BE PACKAGED TO PREVENT DAMAGE DURING SHIPPING. BUBBLE WRAP OR PROTECTIVE COVER MUST BE USED.
 - POLYBAG SHALL BE MARKED WITH SUPPLYNET LOGO, PRODUCT QR CODE, PART NUMBER, CAGE CODE, AND LOT NO, PER SN-STD-LBL REQUIREMENTS.
 - WORKMANSHIP REQUIREMENTS:
 - MANUFACTURE TO IAW/WHMA A-620 CLASS 2 REQUIREMENTS.
 - SOLDERING SHALL BE COMPLIANT WITH IAW J-STD-001 AS APPLICABLE.
 - CONNECTOR(S) AND WIRE SHALL BE FREE FROM ANY SCRATCHES, CHIPS, FLASHING AND DEFECTS.
 - INSPECTION REQUIREMENTS:
 - EACH COMPLETED ASSEMBLY TO BE 100% TESTED FOR SHORTS, CONTINUITY, AND JACKET RESISTANCE (250V @100MOHM MIN.)
 - INSPECT TO IPC/WHMA A-620 CLASS 2 REQUIREMENTS.

BILL OF MATERIALS			
ITEM NO.	PART NUMBER	QTY	NAME
1	807-309-06ZNU6-6PY	1	MALE NETT WARRIOR
2	BE-04	1	BANDING CLAMP
3	RR-AFX2-144G	0.5	USB 2 EXTENSION CABLE - FEMALE TO FEMALE - 144 IN.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	SupplyNet DESIGN ENGINEERING MANUFACTURING	
DIMENSIONS ARE IN: INCHES		DRAWN	CWA	TITLE: HOST MODE OTG ADAPTER CABLE	
TOLERANCES: .XX: ± 0.03 .XXX: ± 0.005		CHECKED	RB		
ANGULAR: .X*: 1° .XX*: 0.5°		COMMENTS:		SIZE B DWG. NO. SN-8071-3628 REV A	
BREAK EDGES: .005 - .020 FILLET: .005 - .020 SURFACE FINISH:					
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.			
MATERIAL: SEE DRAWING NOTES					
FINISH: SEE DRAWING NOTES		DO NOT SCALE DRAWING		CAGE CODE: 1HJX9	
				SCALE: NA	WEIGHT:
				SHEET 1 OF 1	