



REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	INITIAL RELEASE	09/21/2016	TC
B	DISSOLVED FAMILY DRAWING. ADDED NOTES. CORRECTED MODEL	2/22/2024	MOB

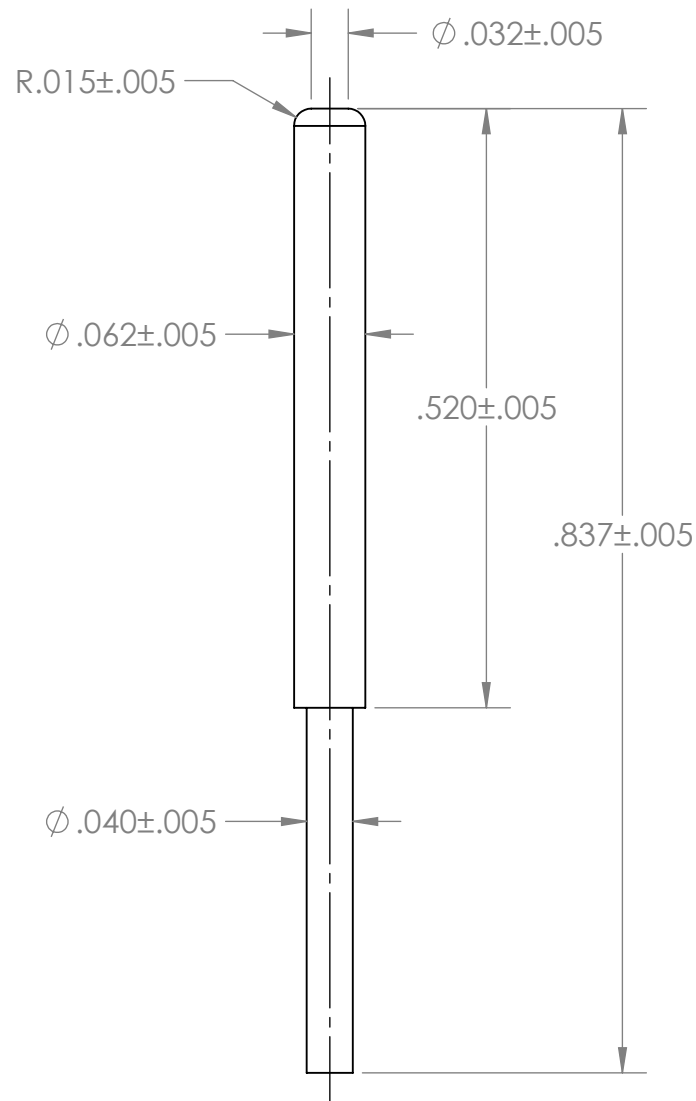

NOTES:

- MATERIAL: BRASS PER UNS C36000, ALLOY 61A, FULL OR HALF HARD.
- FINISH: GOLD PER MIL-G-45204 TYPE II, GRADE C, CLASS 00 (.000020 MIN.), OVER NICKEL PER QQ-N-290, CLASS 1, .000050 - .000100 THICK.
- DIMENSIONS AFTER PLATING.
- ALL DIMENSIONS SHALL BE CONCENTRIC WITHIN .003 T.I.R.
- ALL MACHINED SURFACES TO HAVE A $\sqrt{63}$ FINISH OR BETTER.
- REMOVE ALL BURRS AND BREAK SHARP EDGES & FILLETS TO R.003 MAX.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN: INCHES	DRAWN	TC 9/21/2016
TOLERANCES: .XX: ± 0.03	CHECKED	TC 9/21/2016
.XXX: ± 0.005	COMMENTS:	
ANGULAR: .X°: 1°		
.XX°: 0.5°		
BREAK EDGES: .005 - .020		
FILLETS: .005 - .020		
SURFACE FINISH:		
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009		
MATERIAL: SEE DRAWING NOTES		
FINISH: SEE DRAWING NOTES		
DO NOT SCALE DRAWING		

REF. NUMBER: SN0016



TITLE:
CONNECTOR POWER PIN

SIZE	DWG. NO.	REV
B	SN0016-1	B
SCALE: NA	WEIGHT:	SHEET 1 OF 1

CAGE CODE: 1HJX9