

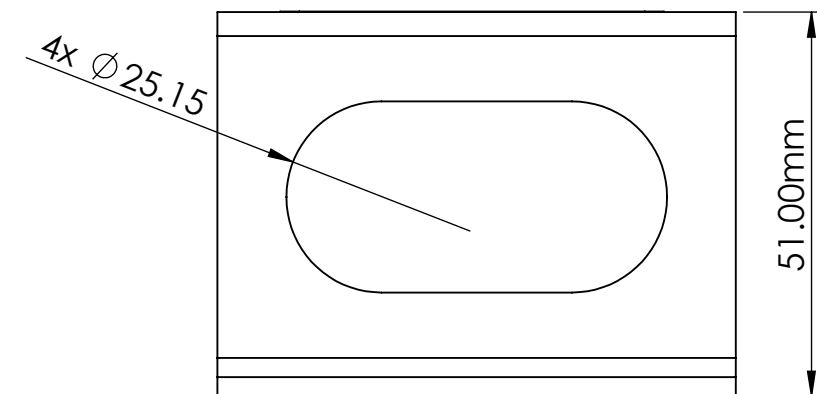
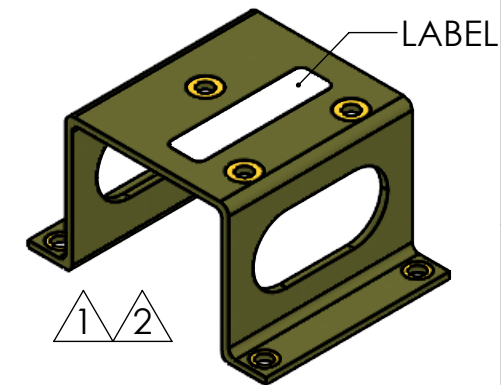


REVISIONS			
REV.	DESCRIPTION	DATE	ENG
A	RELEASED	07/06/2026	CWA
B	UPDATED DRAWING FORMAT	07/10/2026	CWA
C	ADDED LABEL	07/13/2026	CWA

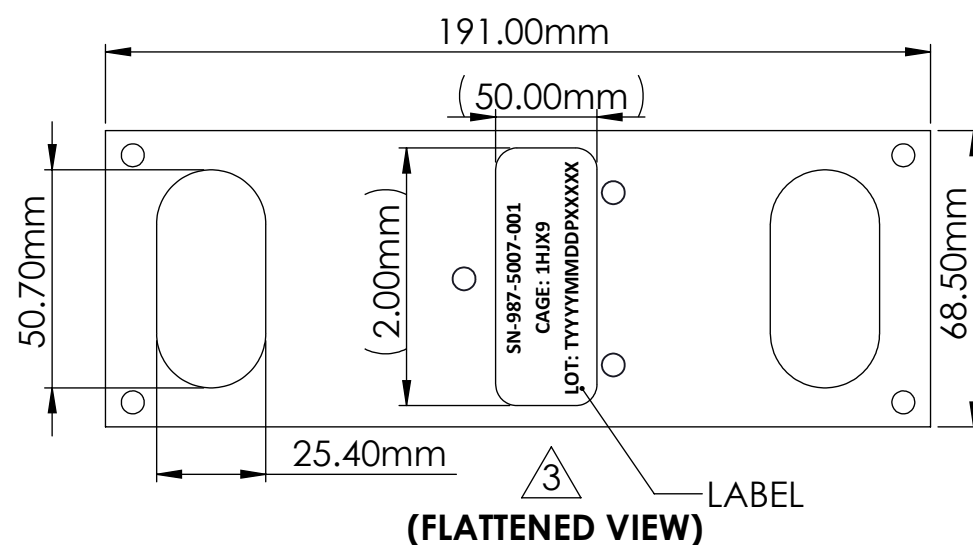

BILL OF MATERIALS			
ITEM NO.	PART NO.	QTY	NAME/DESCRIPTION
1	5052-H32	1	DAGR CABLE FABRICATION
2	EFG-202-D0	1	POWDER COAT
3	MIL-DTL-5541	1	GOLD COATING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (IN) TOLERANCES: 1 PLACES ±.1 2 PLACES ±.03 3 PLACES ±.005 ANGLES 1 PLACE ±.1° 2 PLACES ±.5° BREAK EDGES .005 - .020 FILLET .005 - .020		NAME		DATE		SupplyNet DESIGN ENGINEERING MANUFACTURING					
DRAWN		CWA		7/6/2026							
CHECKED		GMW		7/6/2026		TITLE: DAGR ADAPTER BRACKET FOR INSTALLATION MOUNT					
GEOMETRIC TOLERANCING PER: ASME Y14.5-2018		<u>PROPRIETARY AND CONFIDENTIAL</u>									
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.									
FINISH: SEE DRAWING NOTES				SIZE B		CAGE CODE 1HJX9		DWG. NO. SN-987-5007-001		REV C	
MATERIAL: SEE DRAWING NOTES				SCALE: N/A		REF. NUMBER: SN1557				SHEET 1 OF 1	
THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING							

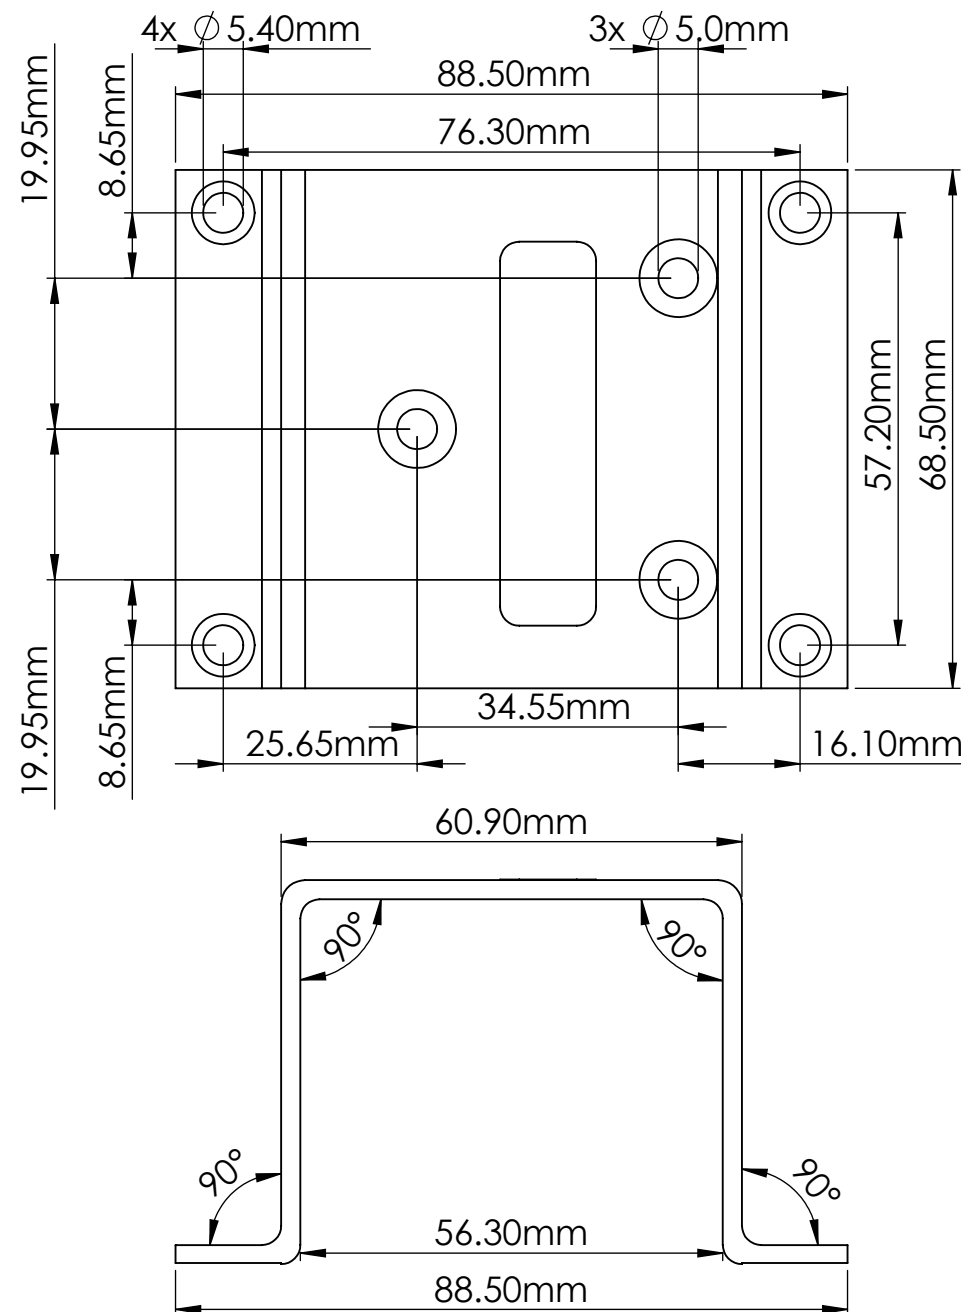

1) MATERIAL: 2.6mm THICKNESS ALUMINUM ALLOY 5052-H32 IN ACCORDANCE WITH QQ-A-250/8

2) FINISH: APPLY CHEMICAL CONVERSION COATING PER MIL-DTL-5541 CLASS 1A, COLOR GOLD. COATING SHALL BE UNIFORM IN APPEARANCE AND FREE BREAKS, SCRATCHED AND LOOSE COATING. MASK PLUNGERS AND POWDER COAT SOFT URETHANE, DUPONT POWDER COATING FINISH.
EFG-202-S0 OR EQUIVALENT, OBSERVE NO PAINT ZONES.

3) MARK PART IN LOCATION SHOWN WITH PERMANENT CONTRASTING COLOUR INK, USING APPROX. 3.0mm HIGH CHARACTERS
LINE #1: **SN-987-5007-001**
LINE #2: **CAGE: 1HJX9**
LINE #3: **LOT: TYYYYMMDDPXXXXX** (YYYY = YEAR OF MFG, MM = MONTH OF MFG, DD = DAY OF MFG, XXXXX = PO NUMBER)

4) BUILT TO IPC/WHMA-A-620 STANDARD, OR MOST CURRENT REVISION.